

AD-A268 298




1

# Atlas of Formability

Chromium Steel

Fe - Cr 12.25  
Flow Stress Curves

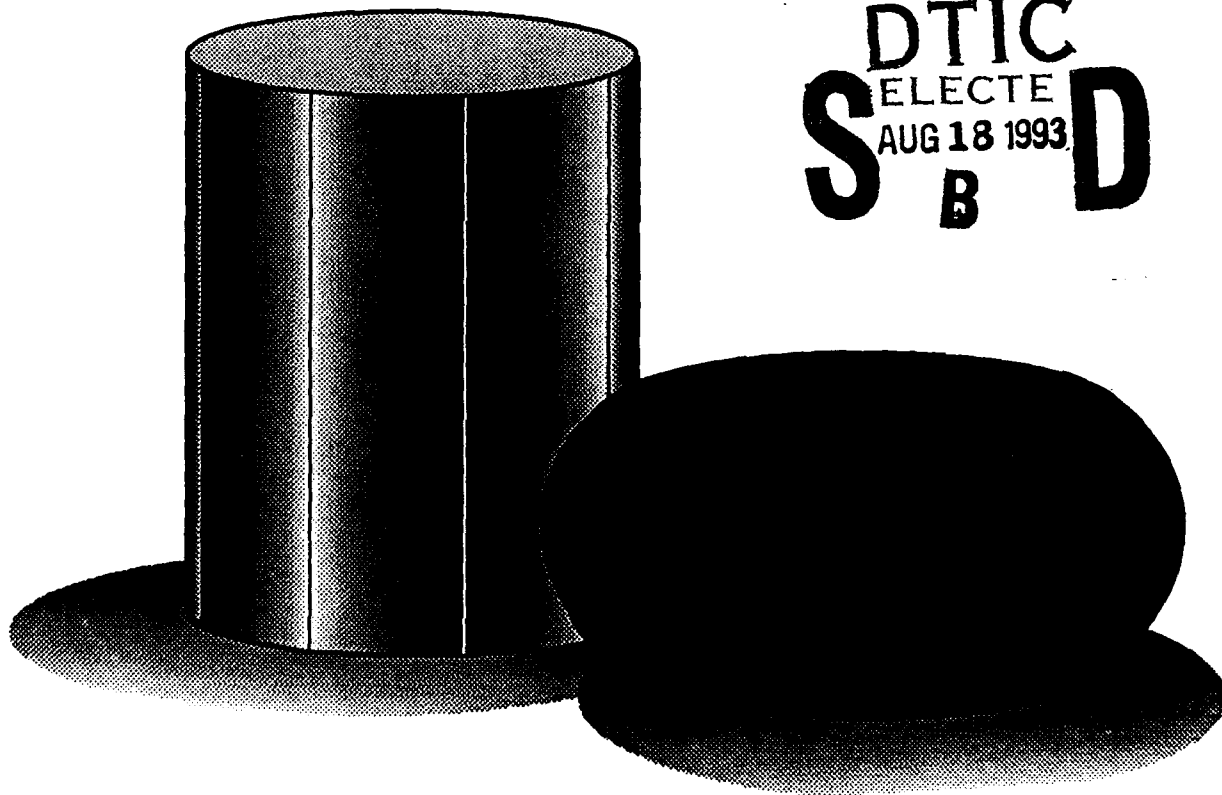

DTIC  
SELECTE  
AUG 18 1993  
S B D

DISTRIBUTION STATEMENT  
Approved for public release  
Distribution Unlimited

93-18848



# NCEMT

93 8 16 12 7

# REPORT DOCUMENTATION PAGE

Form Approved  
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

1. AGENCY USE ONLY (Leave blank)

2. REPORT DATE

June 30, 1991

3. REPORT TYPE AND DATES COVERED

Final, March 31, 1991 - June 30, 1991

4. TITLE AND SUBTITLE

Atlas of Formability  
Chromium Steel

5. FUNDING NUMBERS

C-N00140-88-C-RC21

6. AUTHOR(S)

Howard A. Kuhn

7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)

National Center for Excellence in Metalworking  
Technology (NCEMT)  
1450 Scalp Avenue  
Johnstown, PA 15904

8. PERFORMING ORGANIZATION  
REPORT NUMBER

9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)

Naval Industrial Resources Support Activity  
Building 75-2, Naval Base  
Philadelphia, PA 19112-5078

10. SPONSORING/MONITORING  
AGENCY REPORT NUMBER

11. SUPPLEMENTARY NOTES

12a. DISTRIBUTION/AVAILABILITY STATEMENT

12b. DISTRIBUTION CODE

13. ABSTRACT (Maximum 200 words)

In this investigation, flow behavior of Chromium Steel was studied by conducting compression tests over a wide range of temperatures and strain rates. Stress-strain curves were recorded for each test condition. These data are essential in metalworking process design or finite element analysis of high temperature deformation.

14. SUBJECT TERMS

Chromium Steel, High Temperature Deformation,  
Metalworking

15. NUMBER OF PAGES

22

16. PRICE CODE

17. SECURITY CLASSIFICATION  
OF REPORT

Unclassified

18. SECURITY CLASSIFICATION  
OF THIS PAGE

Unclassified

19. SECURITY CLASSIFICATION  
OF ABSTRACT

Unclassified

20. LIMITATION OF ABSTRACT

**ATLAS OF FORMABILITY  
CHROMIUM STEEL (Fe - Cr 12.25)**

**by**

**Howard A. Kuhn**

**National Center for Excellence in Metalworking Technology  
1450 Scalp Avenue  
Johnstown, PA 15904**

**for**

**Naval Industrial Resource Support Activity  
Building 75-2, Naval Base  
Philadelphia, PA 19112-5078**

**June 30, 1991**

**The views, opinions, and/or findings contained in this report are those of the authors and should not be construed as an official Department of the Navy position, policy, or decision, unless so designated by other documentation**

## TABLE OF CONTENTS

Chemical composition . . . . .	1
Testing Parameters . . . . .	1
Stress-Strain Curves . . . . .	2

ST #A, AUTH USNAVIRSA (MR PLONSKY 8/443-6684)  
 PER TELECON, 17 AUG 93 CB

<b>Accession For</b>	
NTIS GRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By <i>partelecon</i>	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
<i>A-1</i>	

DTIC QUALITY INSPECTED C

## Fe - Cr 12.25

### Chromium Steel

#### Composition:

C	Cb	Cr	Fe	Mn	Mo	Ni	Si
0.15	0.28	12.25	Bal.	0.62	0.02	0.52	0.25


#### Testing Parameters

D <sub>0</sub> (inch)	H <sub>0</sub> (inch)	H <sub>f</sub> (inch)	Strain Rate (1/sec.)	Temperature (deg. F)	Graph Number	Page Number
.500	.750	.362	0.002	1500	12CR09	2
.500	.750	.353	0.002	1700	12CR08	3
.500	.750	.342	0.002	1900	12CR06	4
.500	.750	.306	0.002	2100	12CR03	5
.500	.750	.341	0.002	2250	12CR02	6
-	-	-	0.002	Combination	12CR35	7
.500	.750	.359	0.020	1500	12CR20	8
.500	.750	.352	0.020	1700	12CR18	9
.500	.750	.363	0.020	1900	12CR16	10
.500	.750	.376	0.020	2100	12CR13	11
.500	.750	.364	0.020	2250	12CR12	12
-	-	-	0.020	Combination	12CR36	13
.500	.750	.373	0.500	1500	12CR29	14
.500	.750	.376	0.500	1700	12CR27	15
.500	.750	.374	0.500	1900	12CR25	16
.500	.750	.357	0.500	2100	12CR23	17
.500	.750	.381	0.500	2250	12CR21	18
-	-	-	0.500	Combination	12CR37	19

GRAPH NO: 12CR09


TEMP: 1500 F

STRAIN RATE: 0.002/SEC

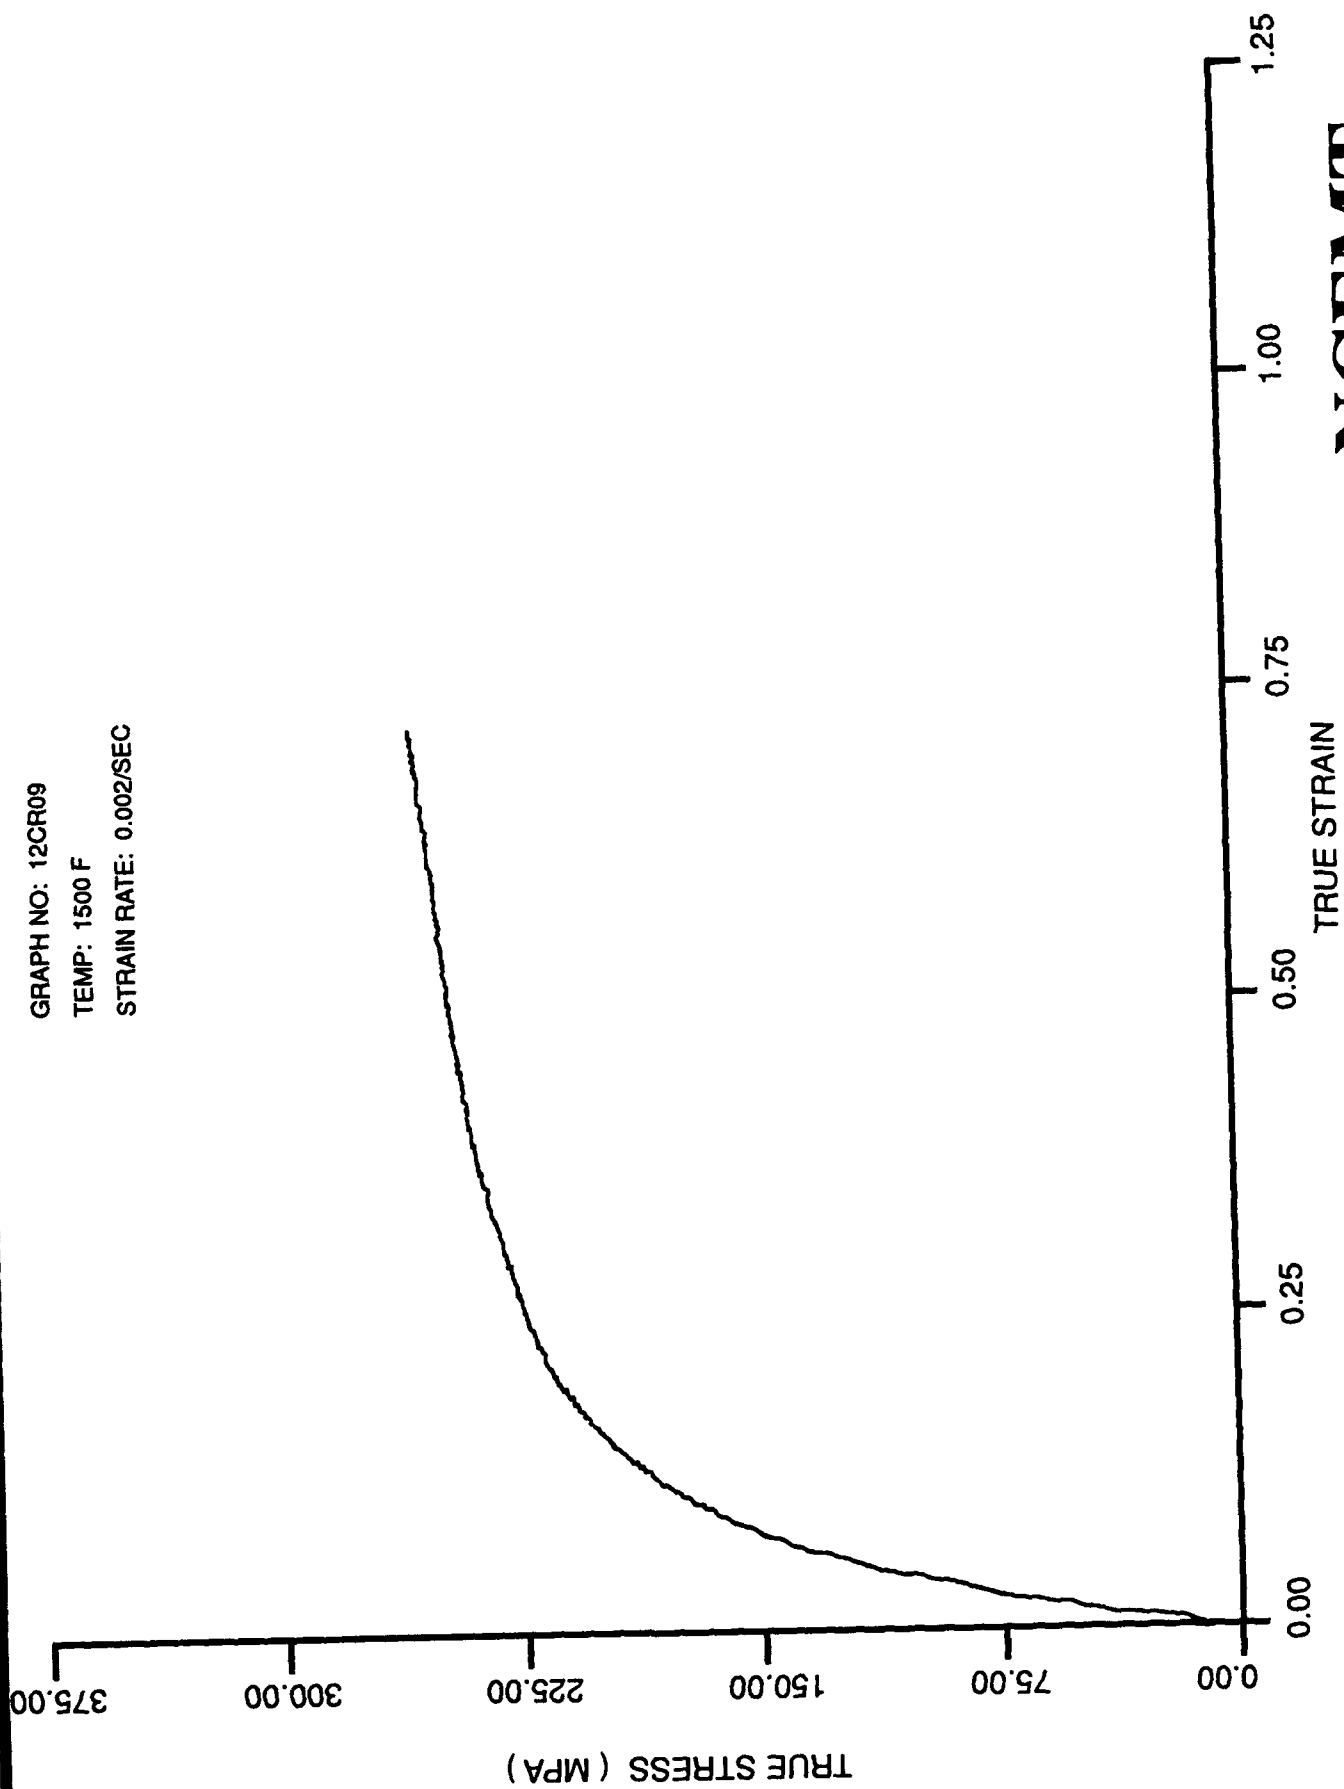


NCENT

GRAPH NO: 12CR08  
TEMP: 1700 F  
STRAIN RATE: 0.002/SEC

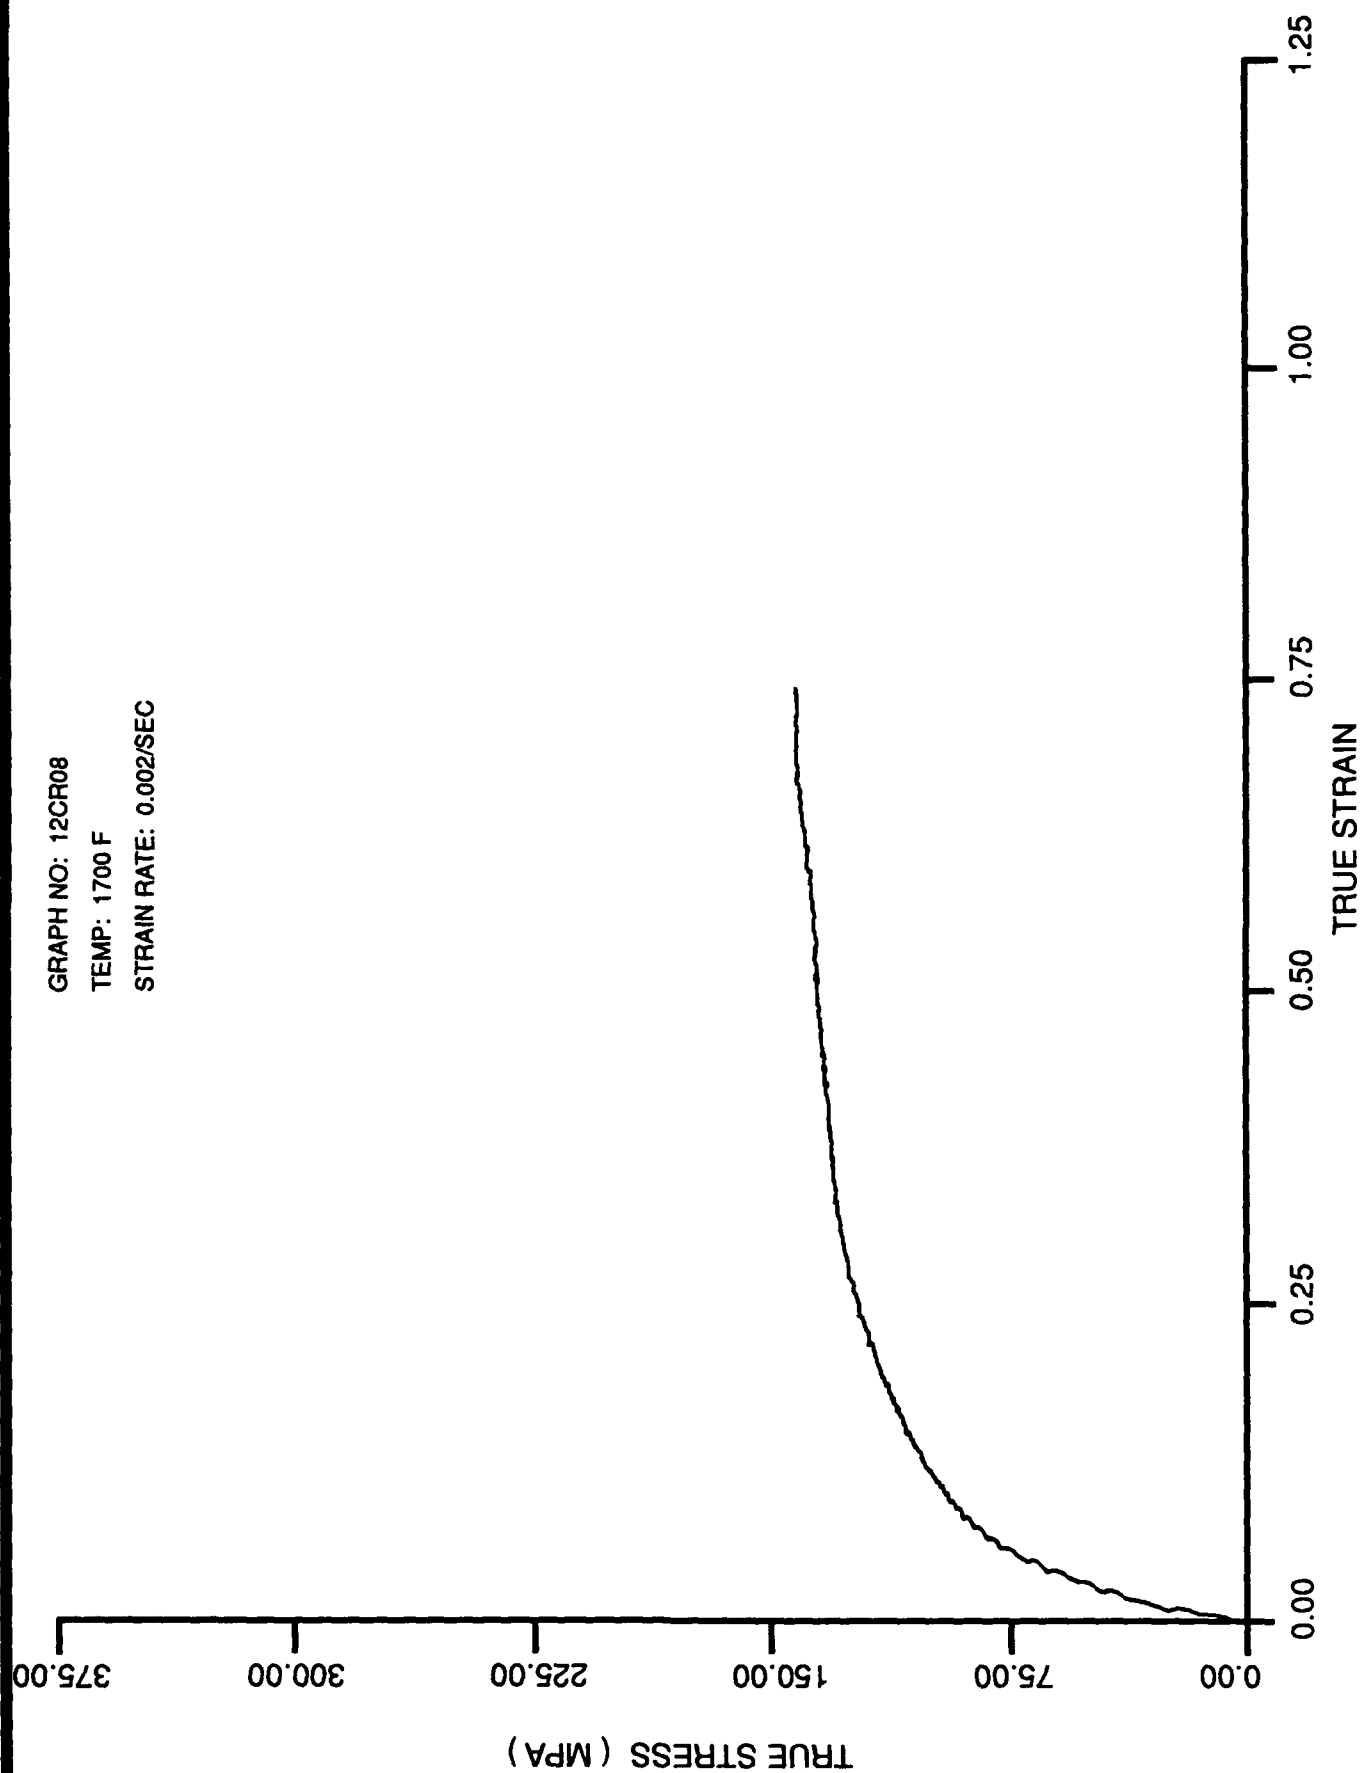


NCEMT

GRAPH NO: 12CR06  
 TEMP: 1900 F  
 STRAIN RATE: 0.002/SEC

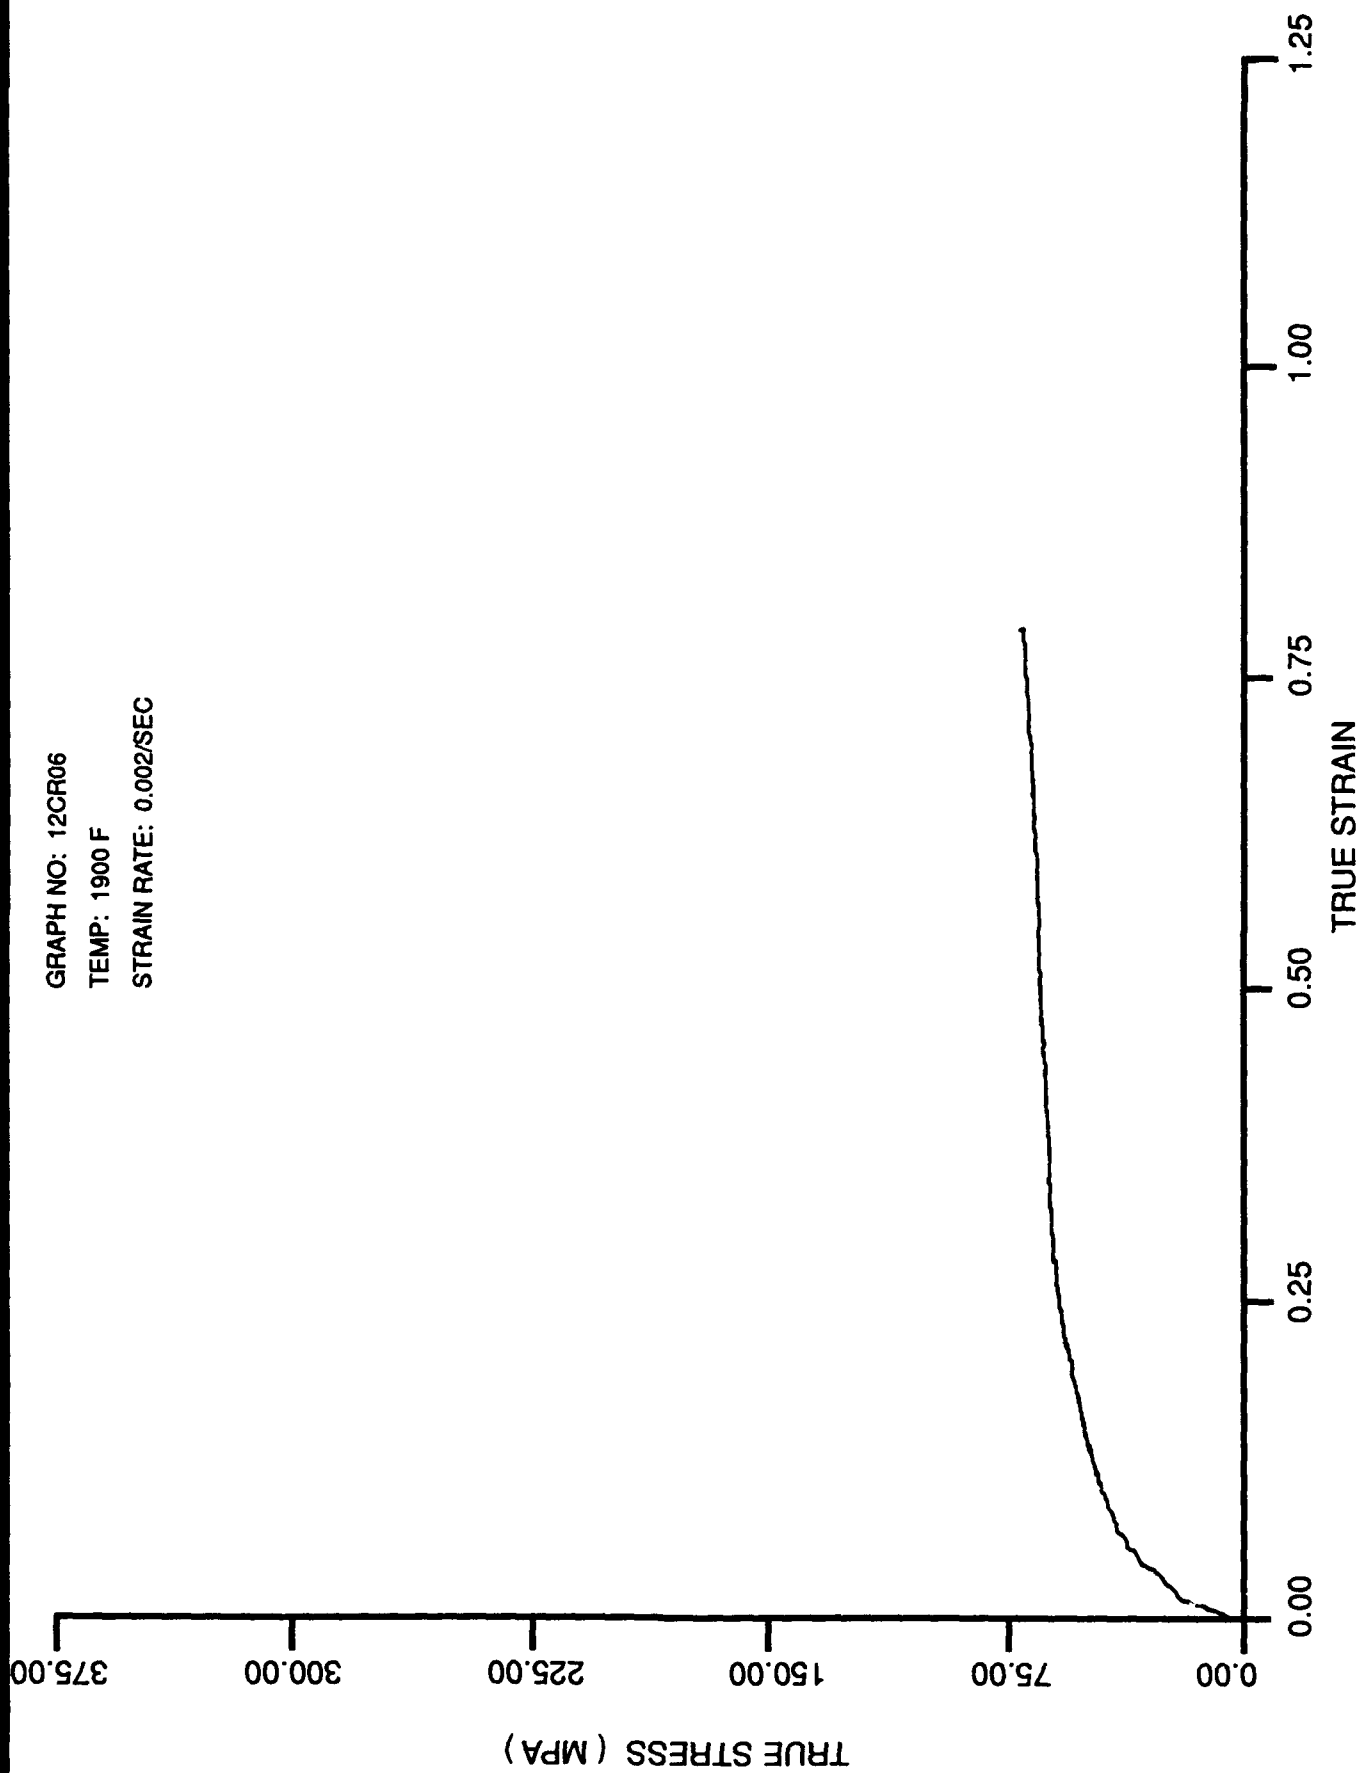





GRAPH NO: 12CR03  
 TEMP: 2100 F  
 STRAIN RATE: 0.002/SEC

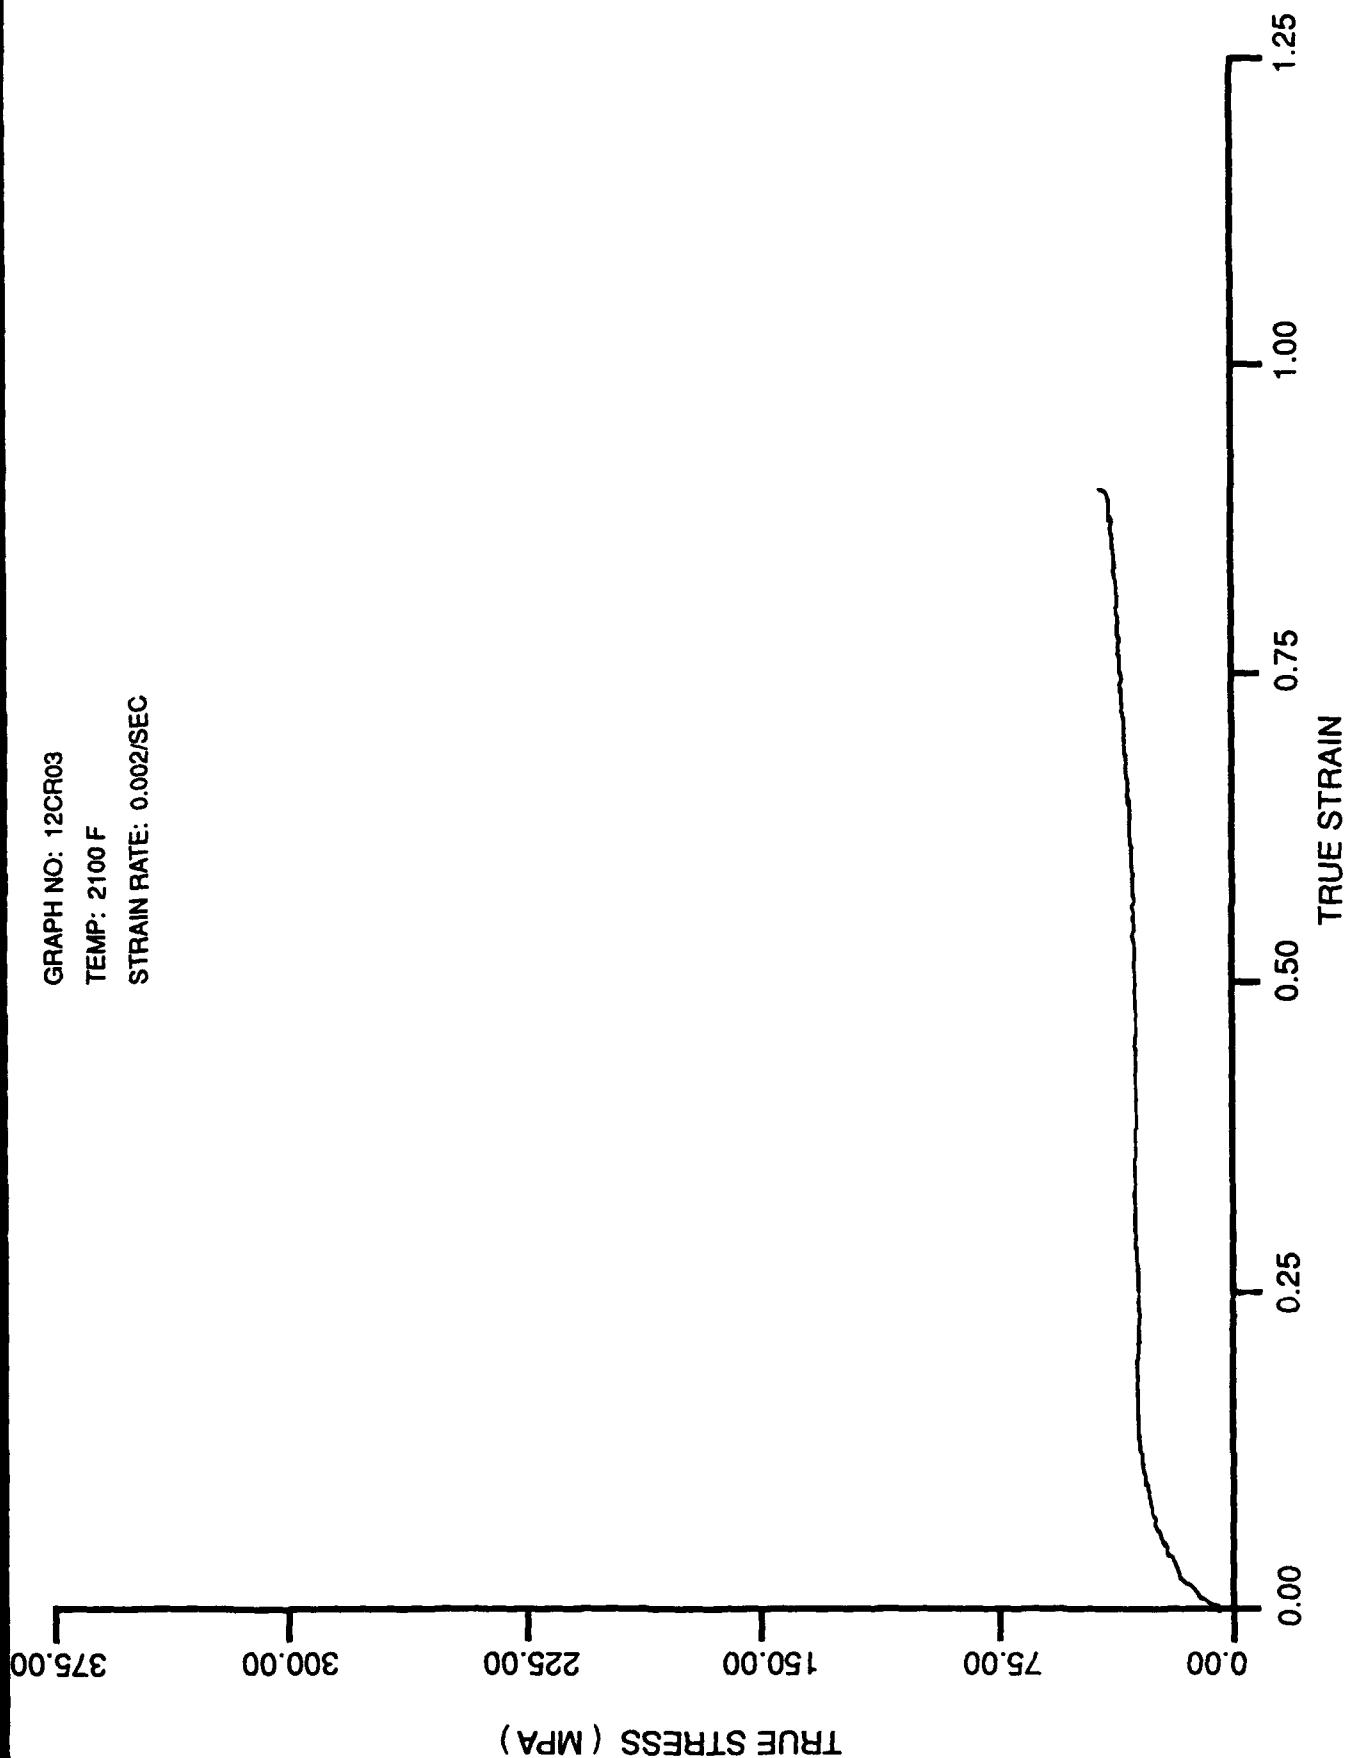


GRAPH NO: 12CR02  
 TEMP: 2250 F  
 STRAIN RATE: 0.002/SEC

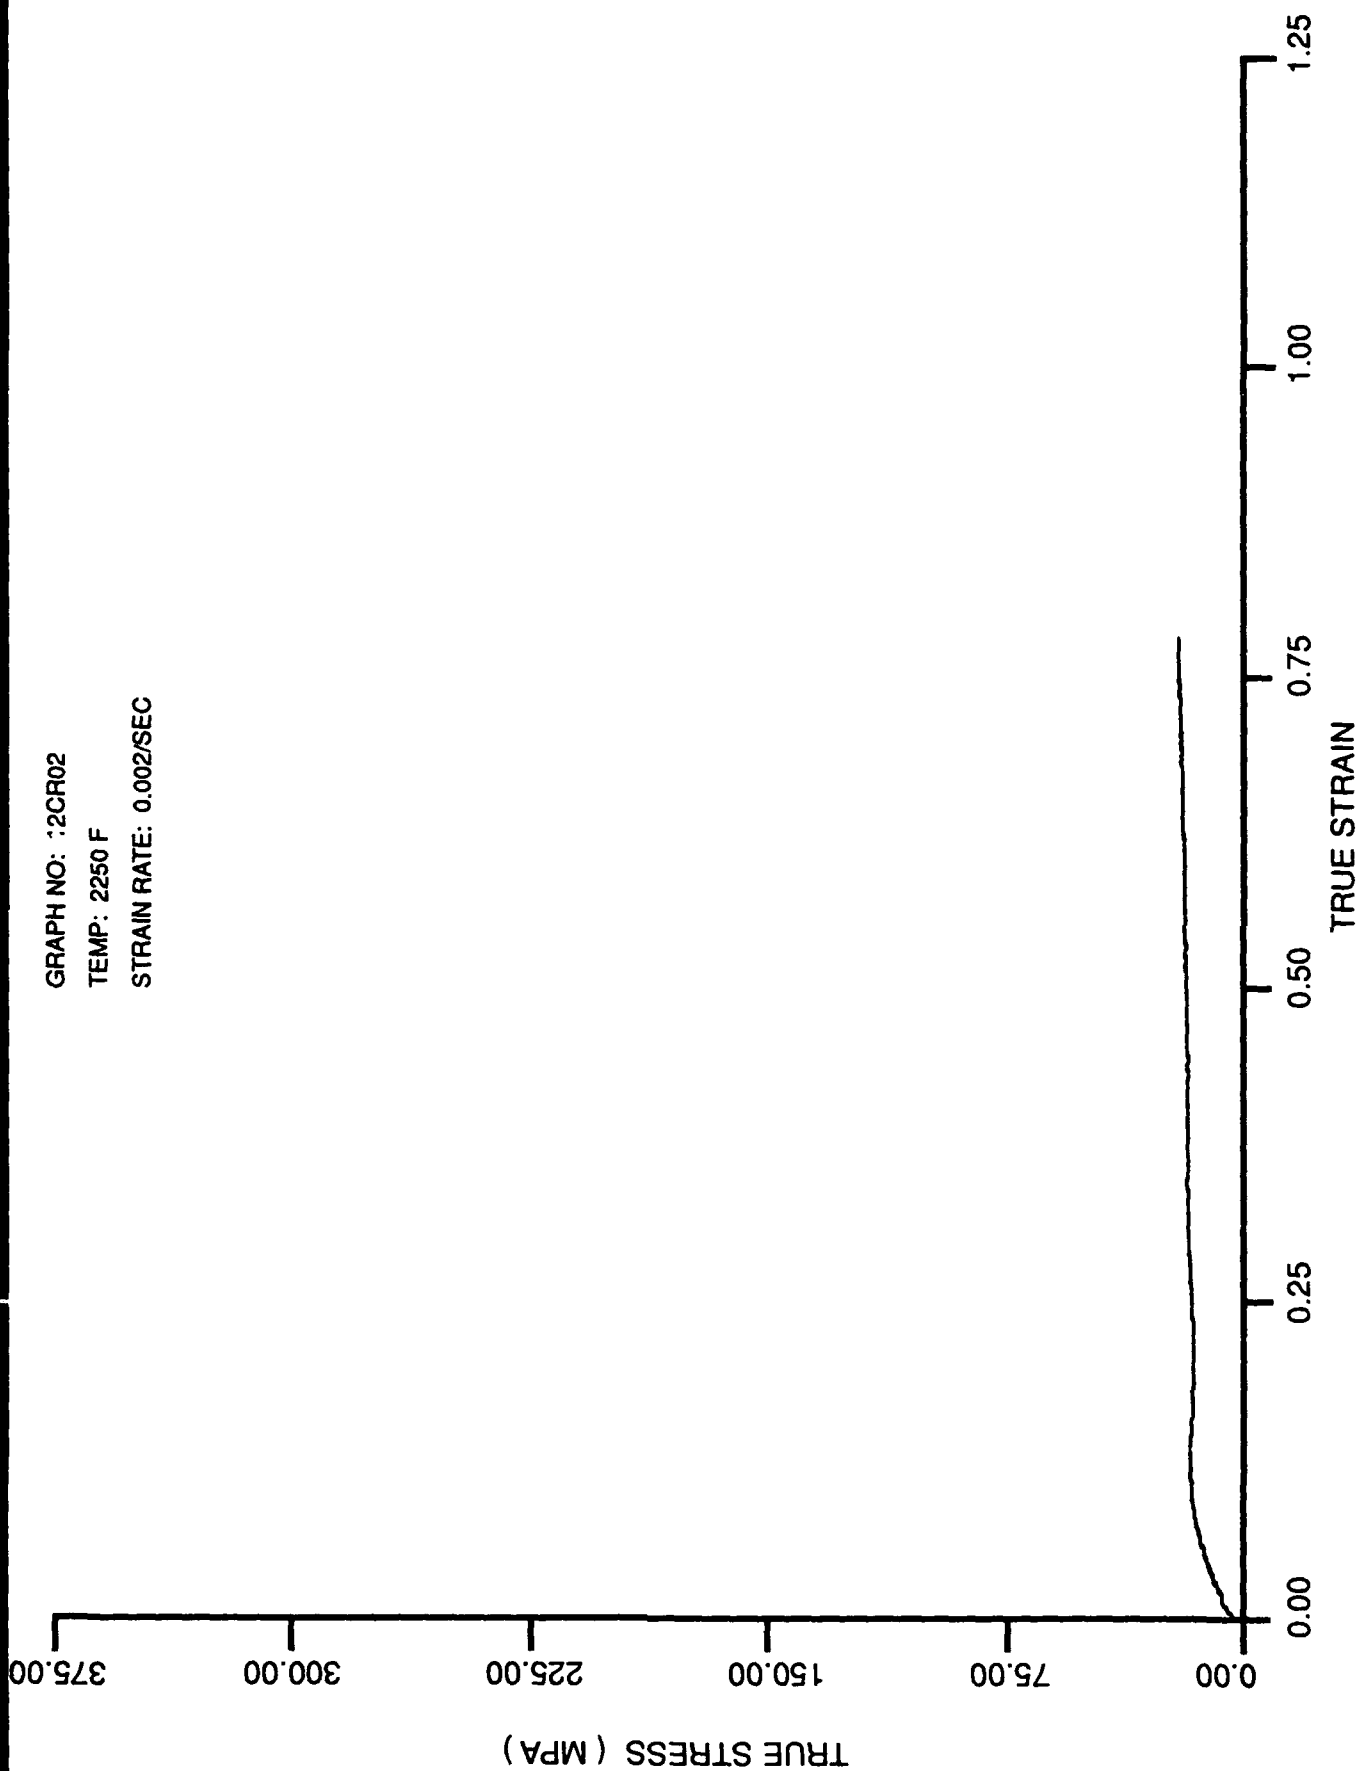


GRAPH NO: 12CR35  
STRAIN RATE: 0.002/SEC

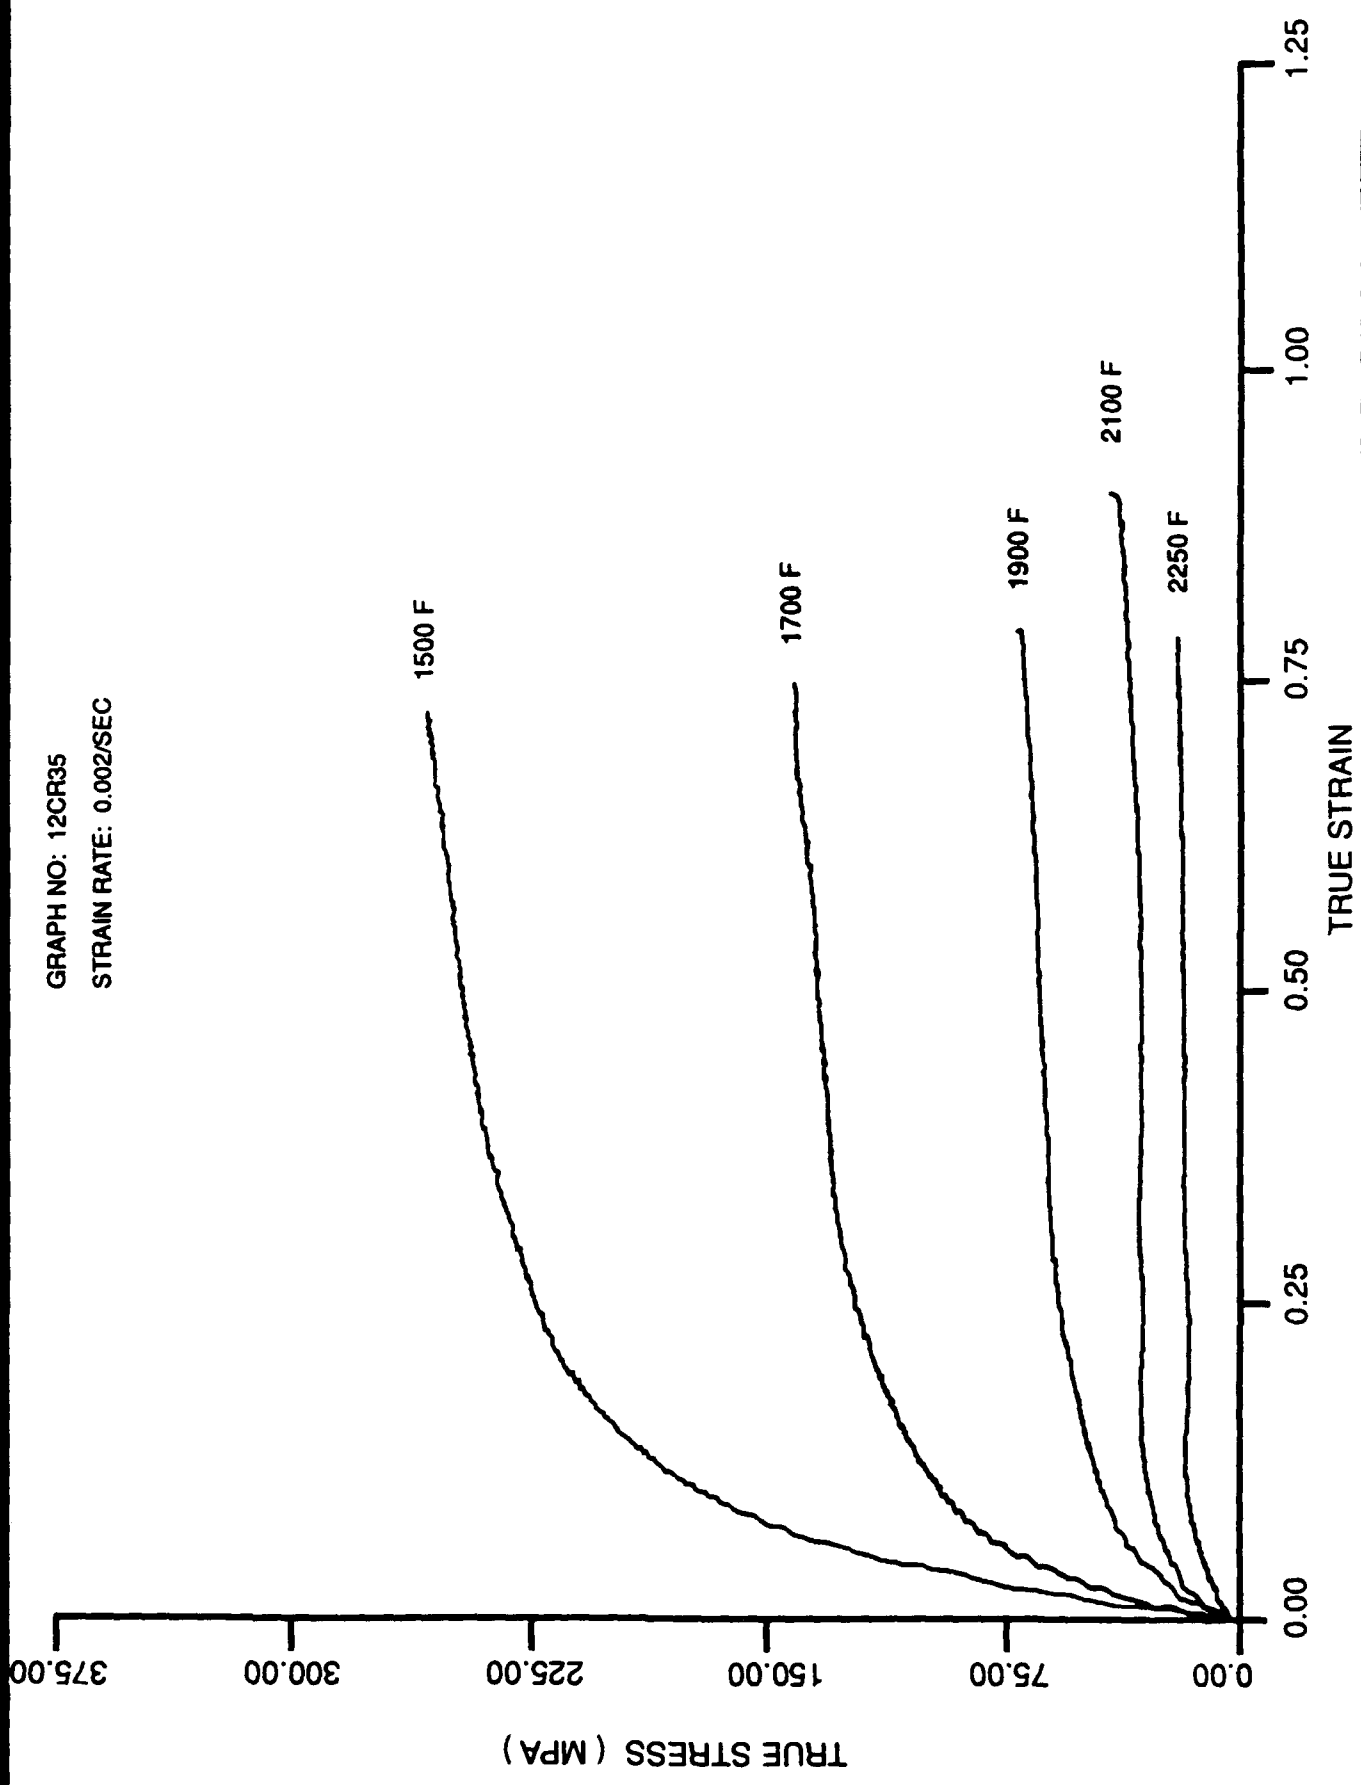


TRUE STRAIN

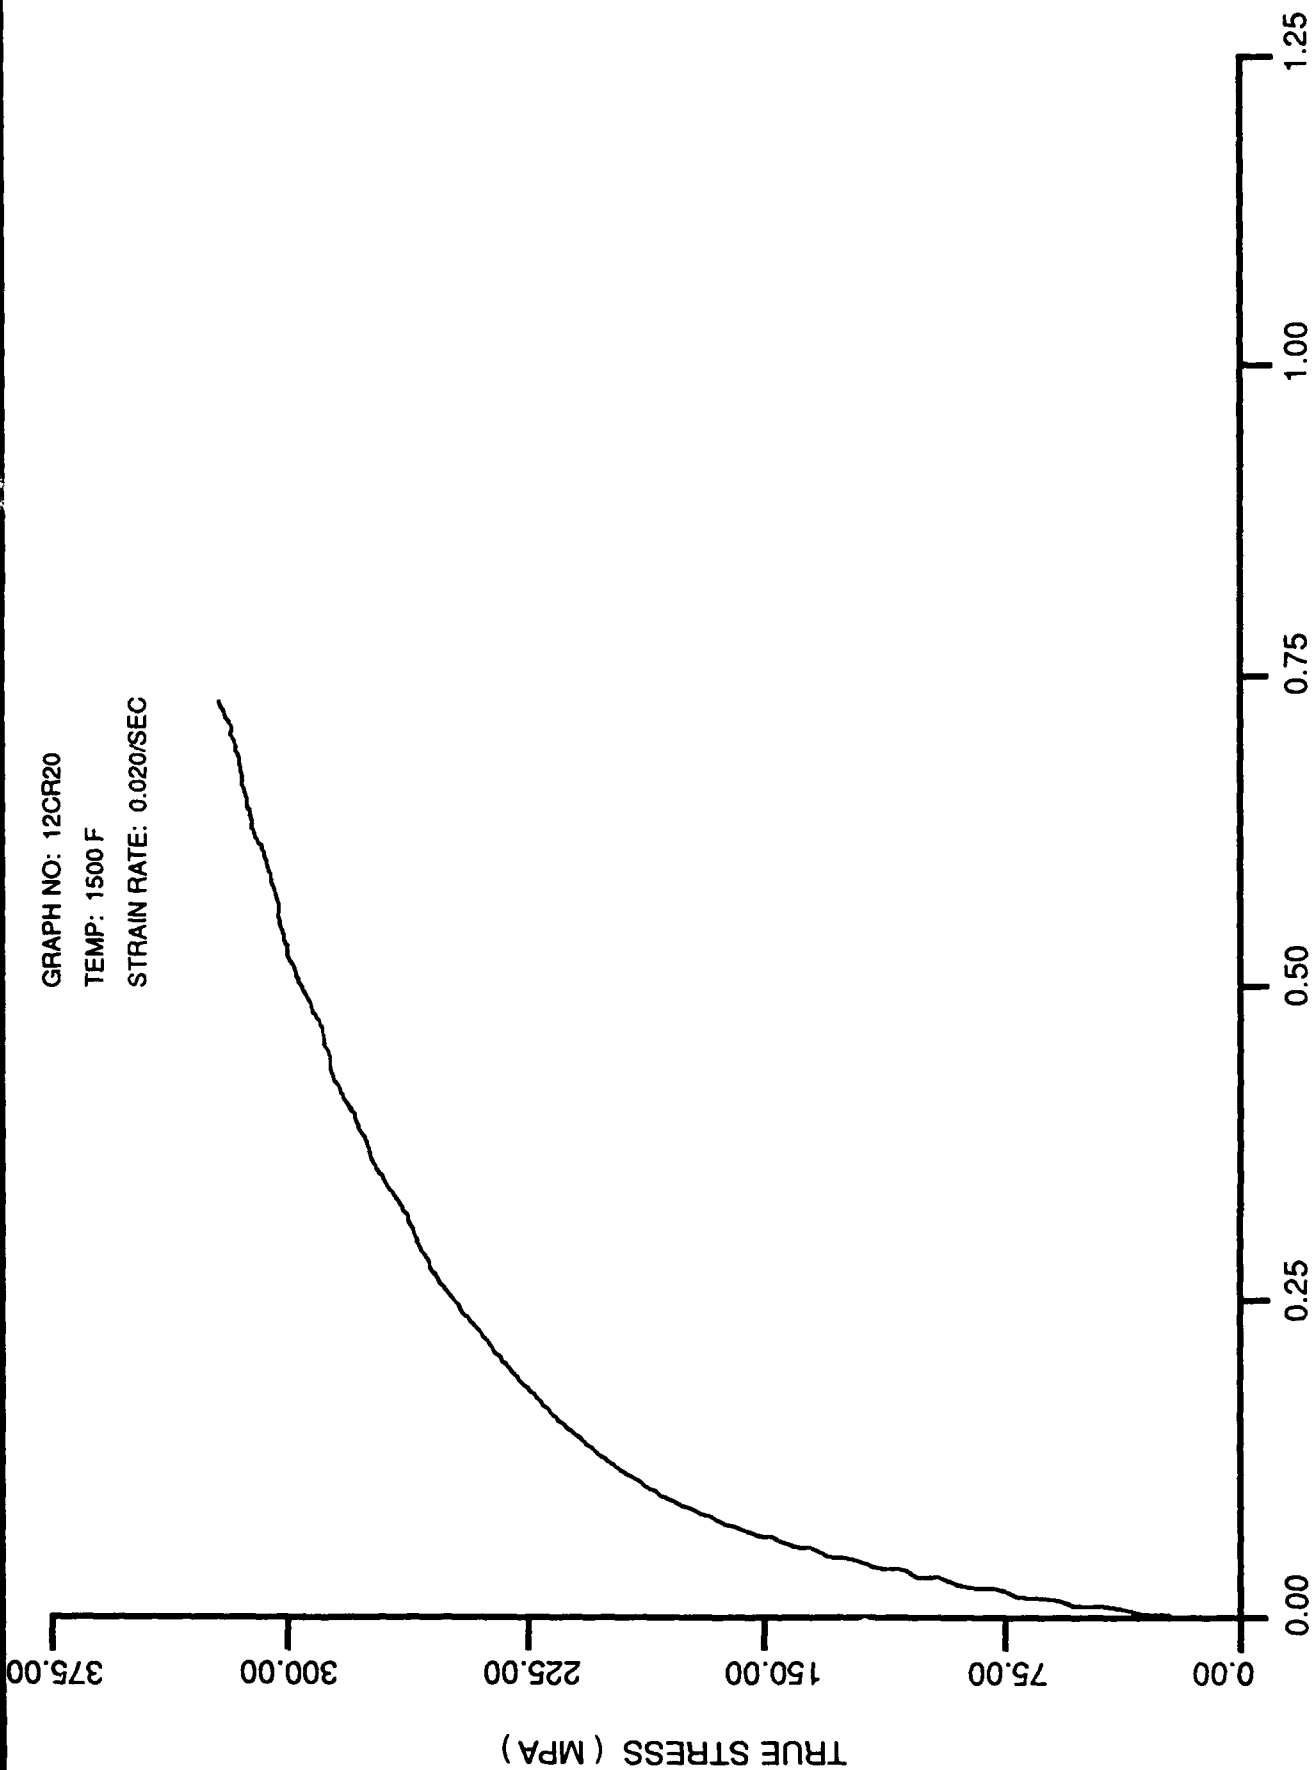

GRAPH NO: 12CR18  
TEMP: 1700 F  
STRAIN RATE: 0.020/SEC

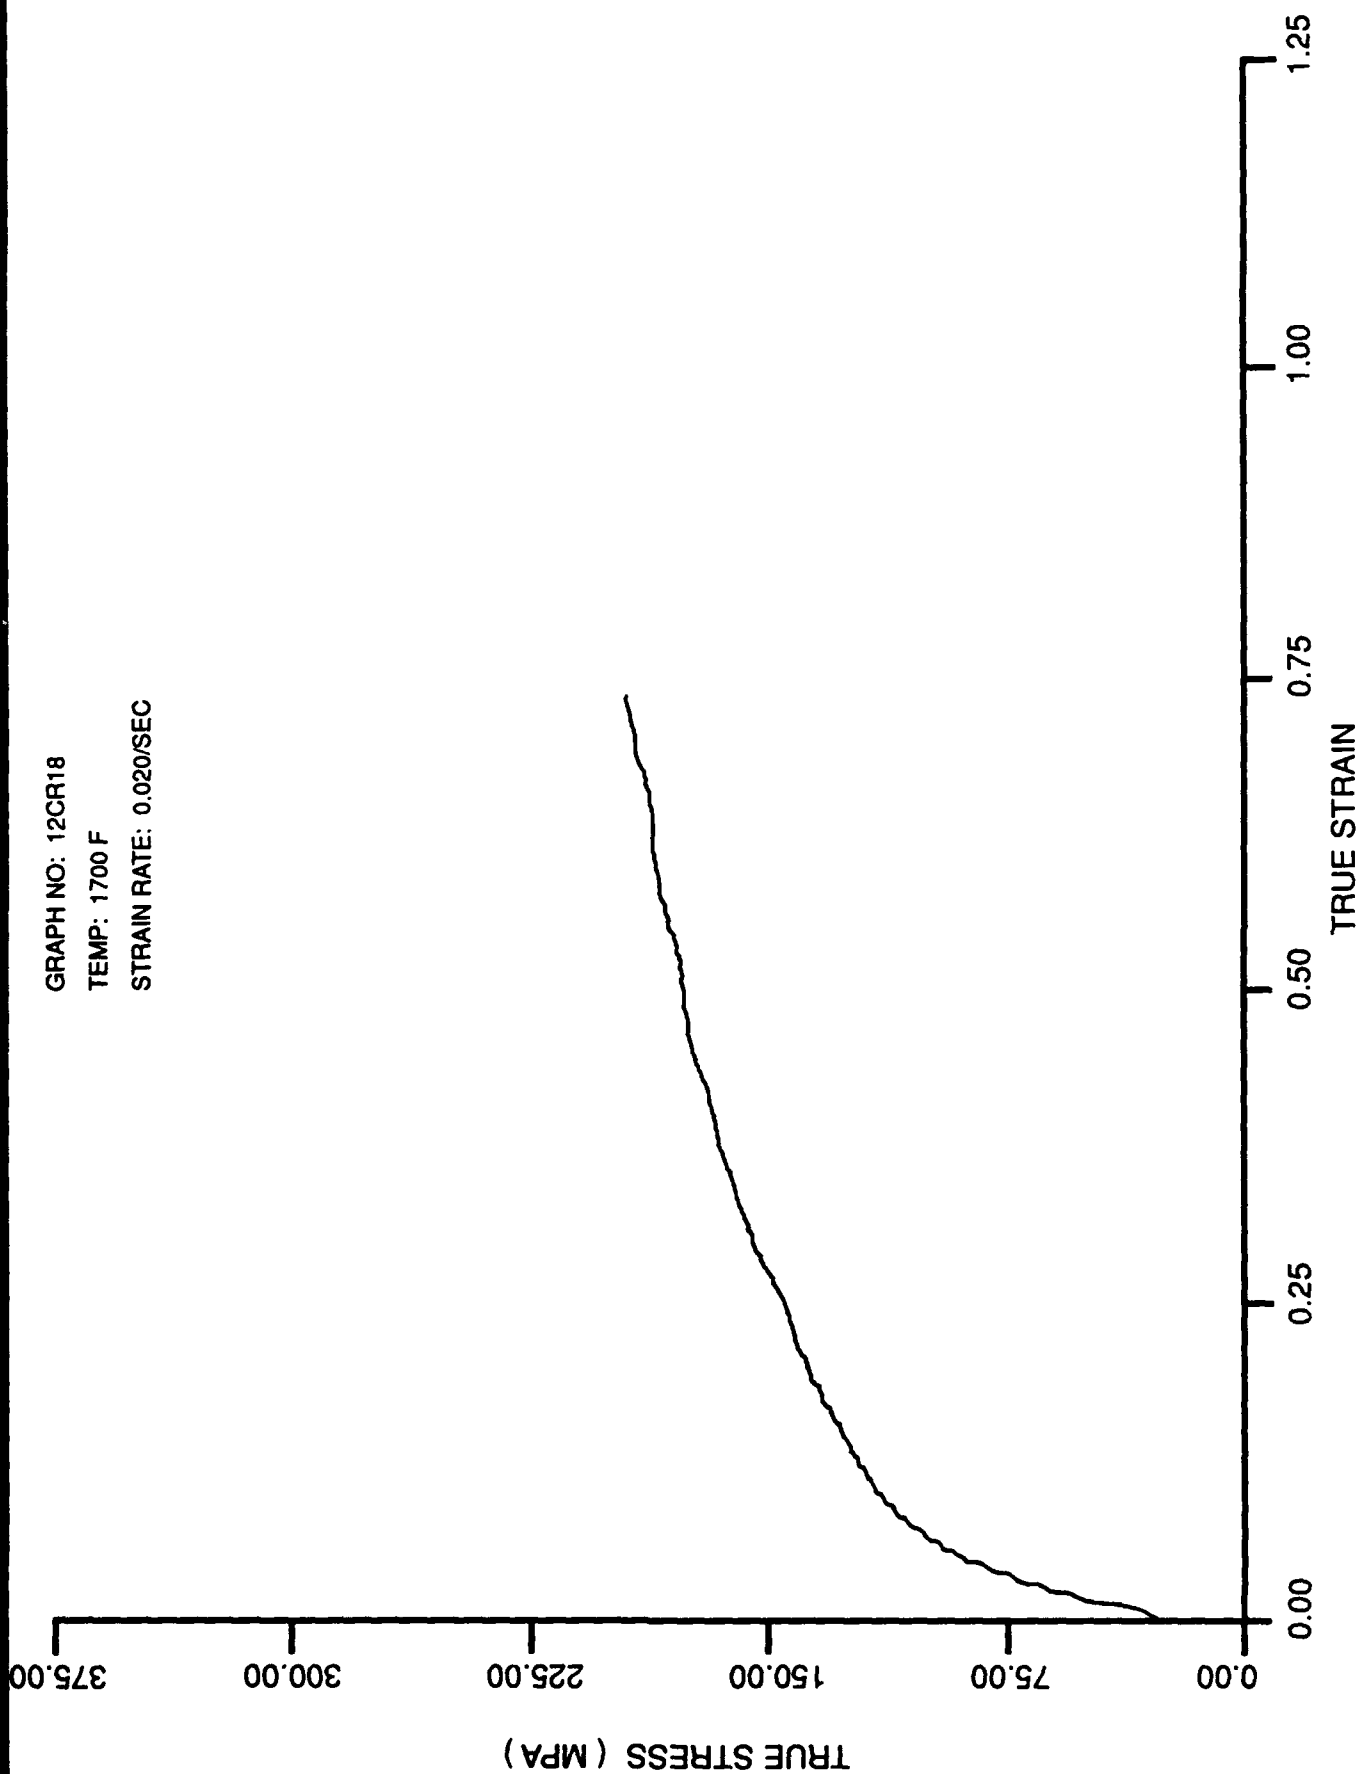


GRAPH NO: 12CR16  
TEMP: 1900 F  
STRAIN RATE: 0.020/SEC

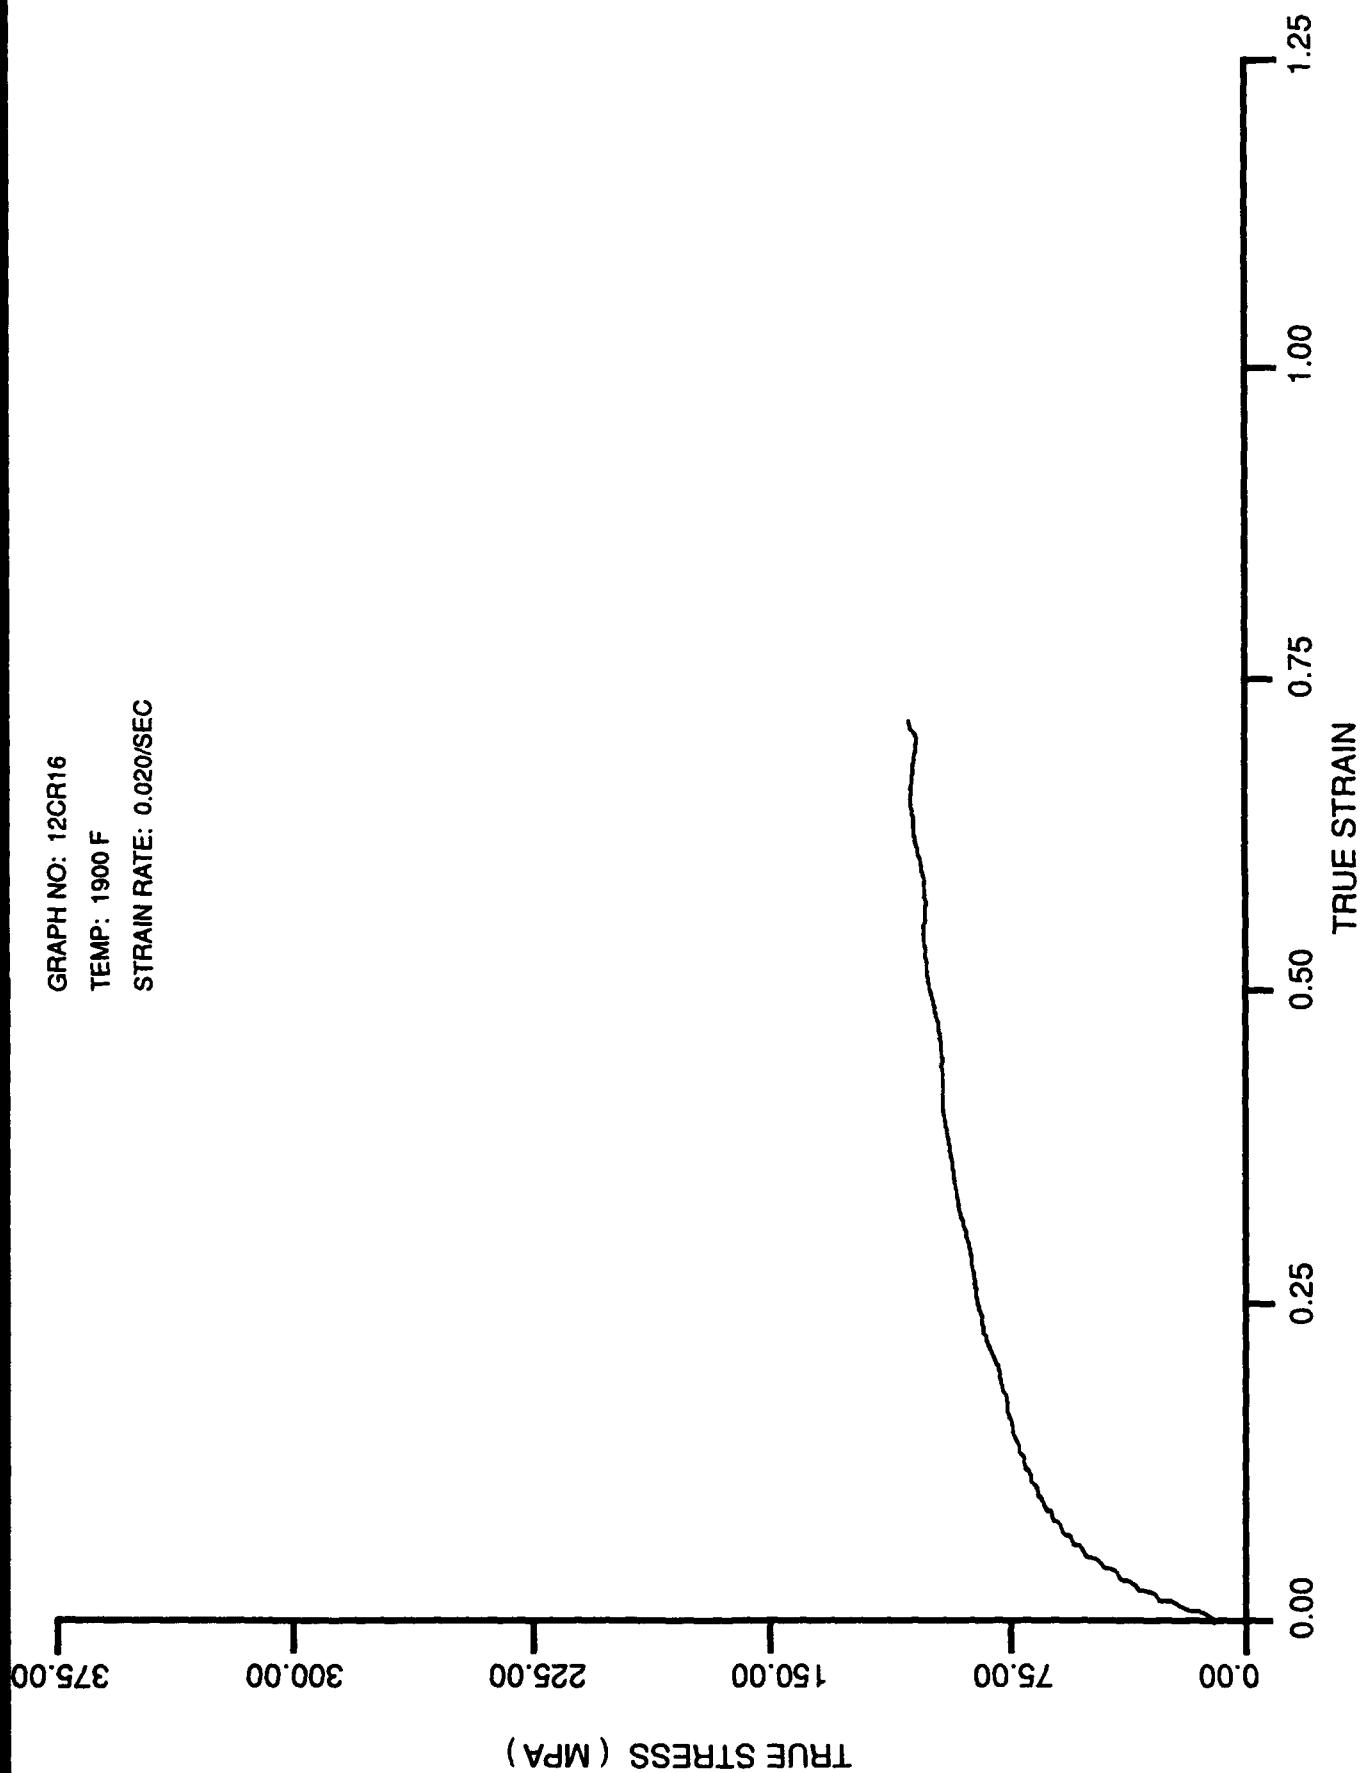


NCEM T


GRAPH NO: 12CR13  
 TEMP: 2100 F  
 STRAIN RATE: 0.020/SEC

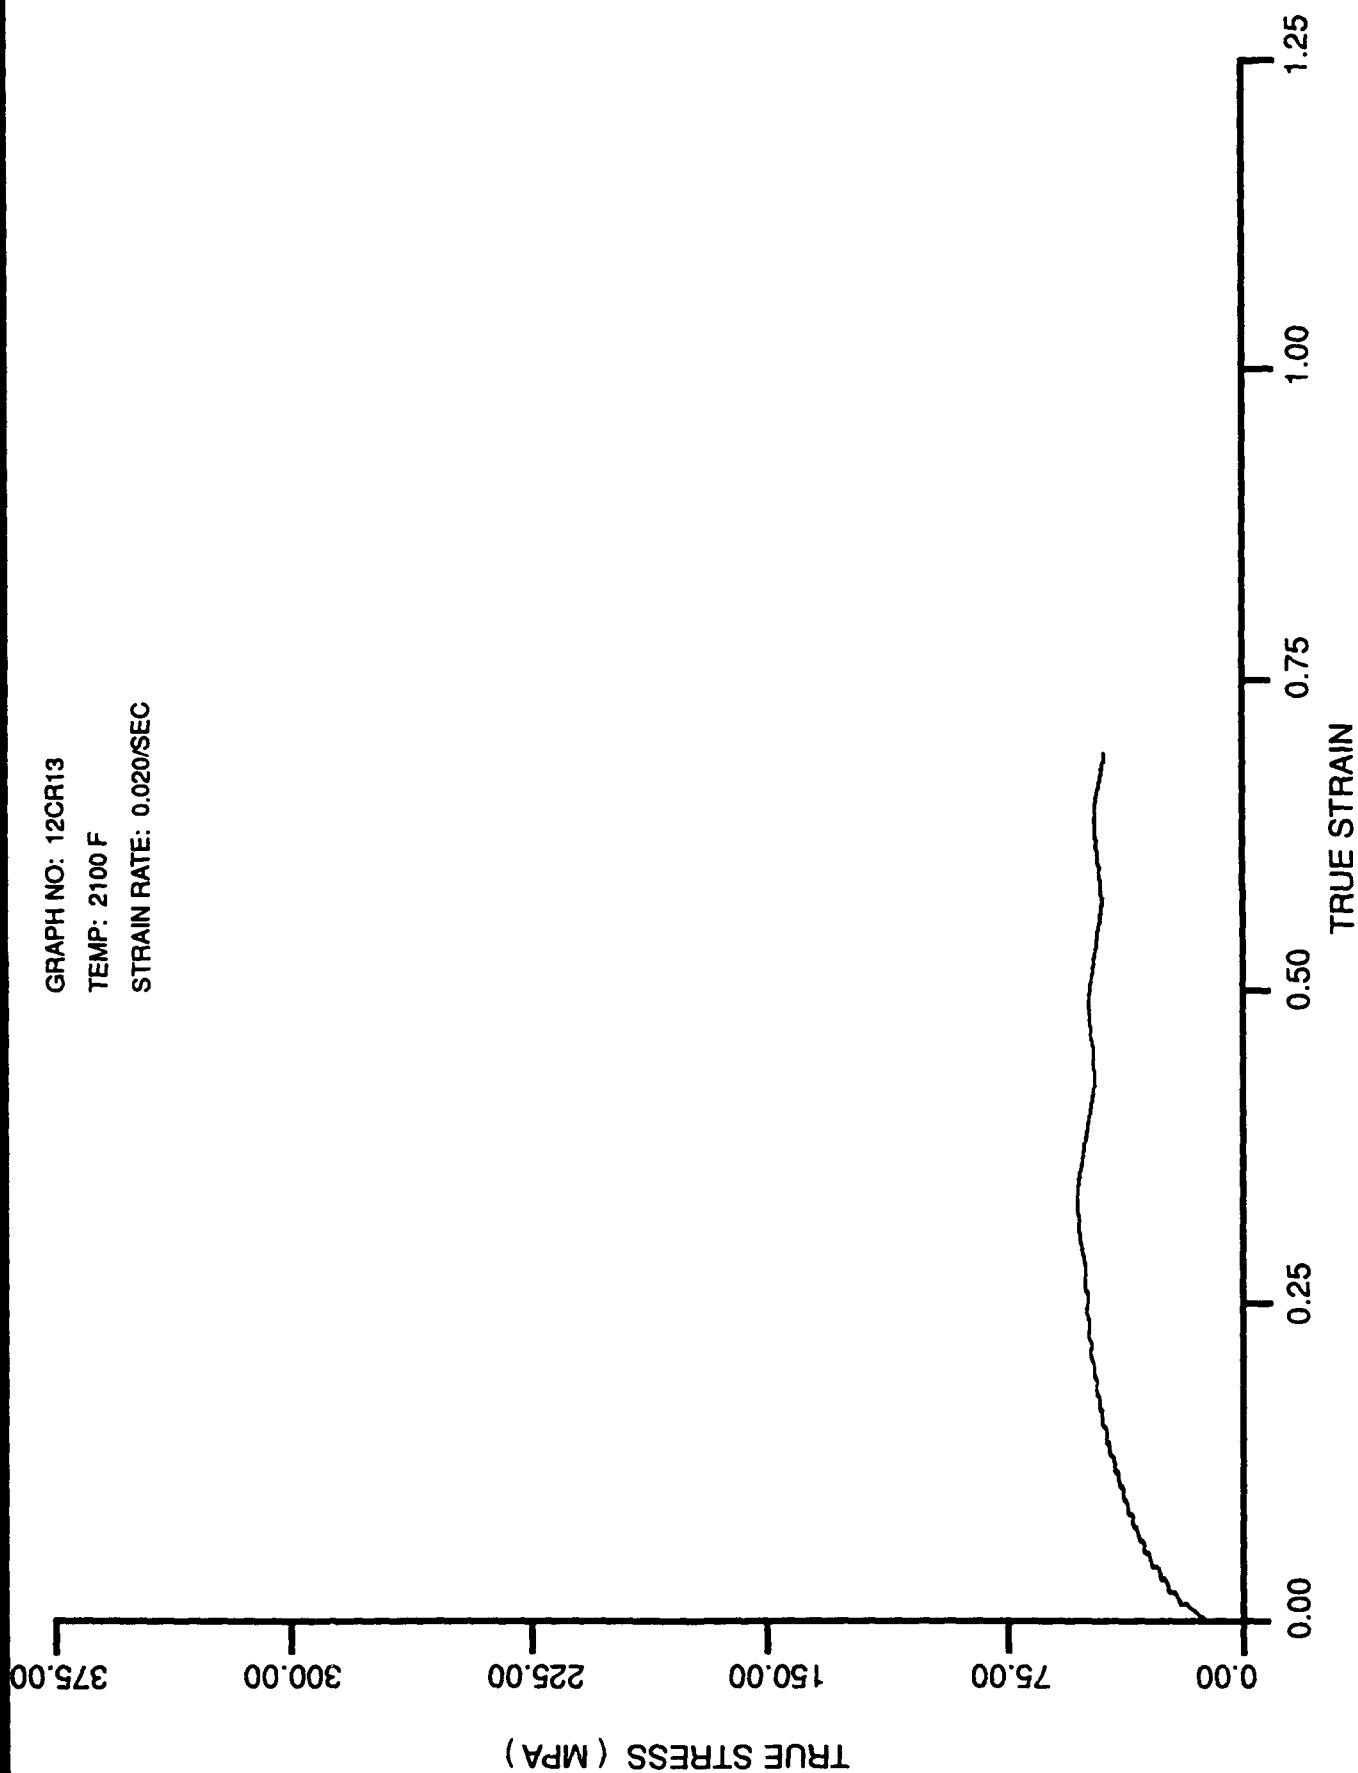


GRAPH NO: 12CR12  
 TEMP: 2250 F  
 STRAIN RATE: 0.020/SEC

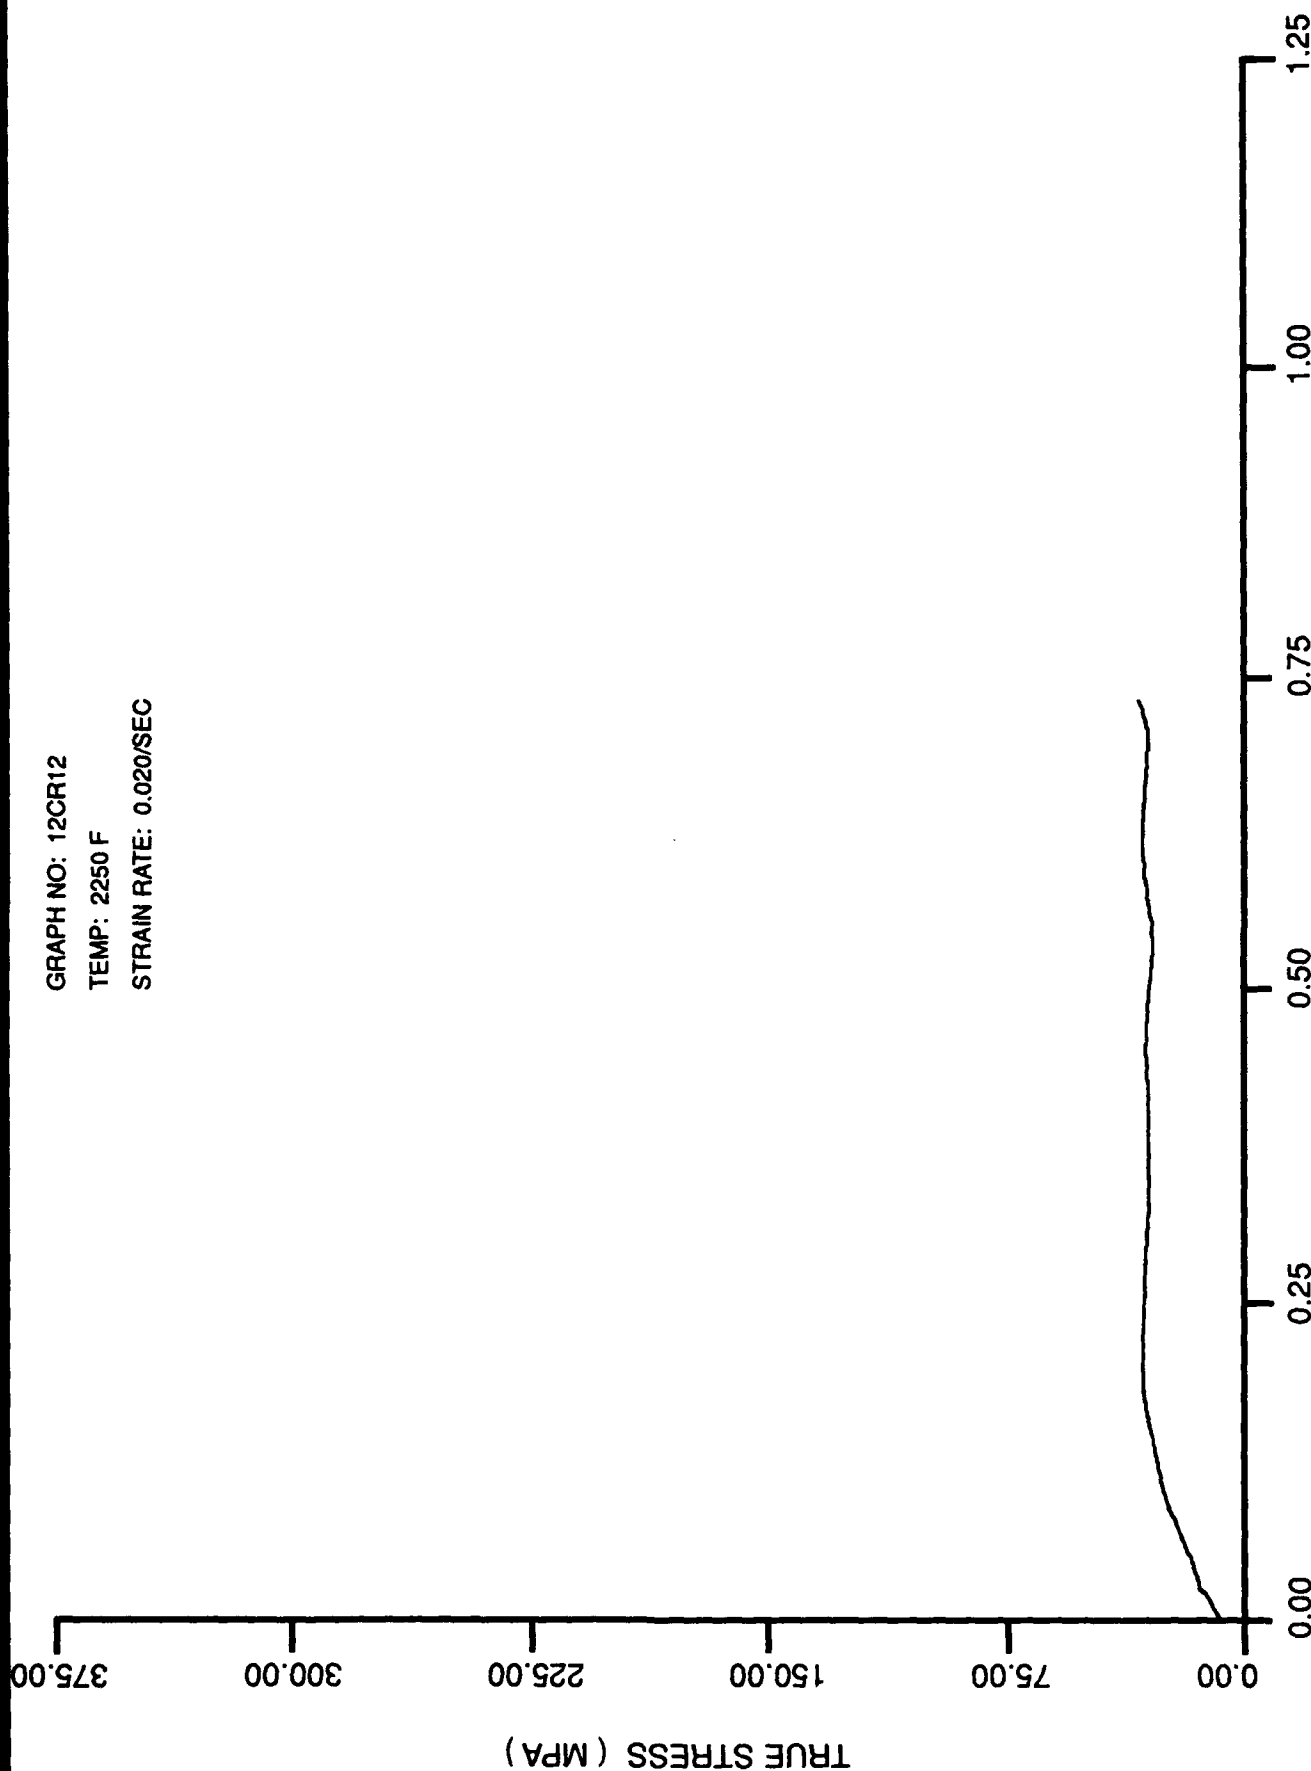




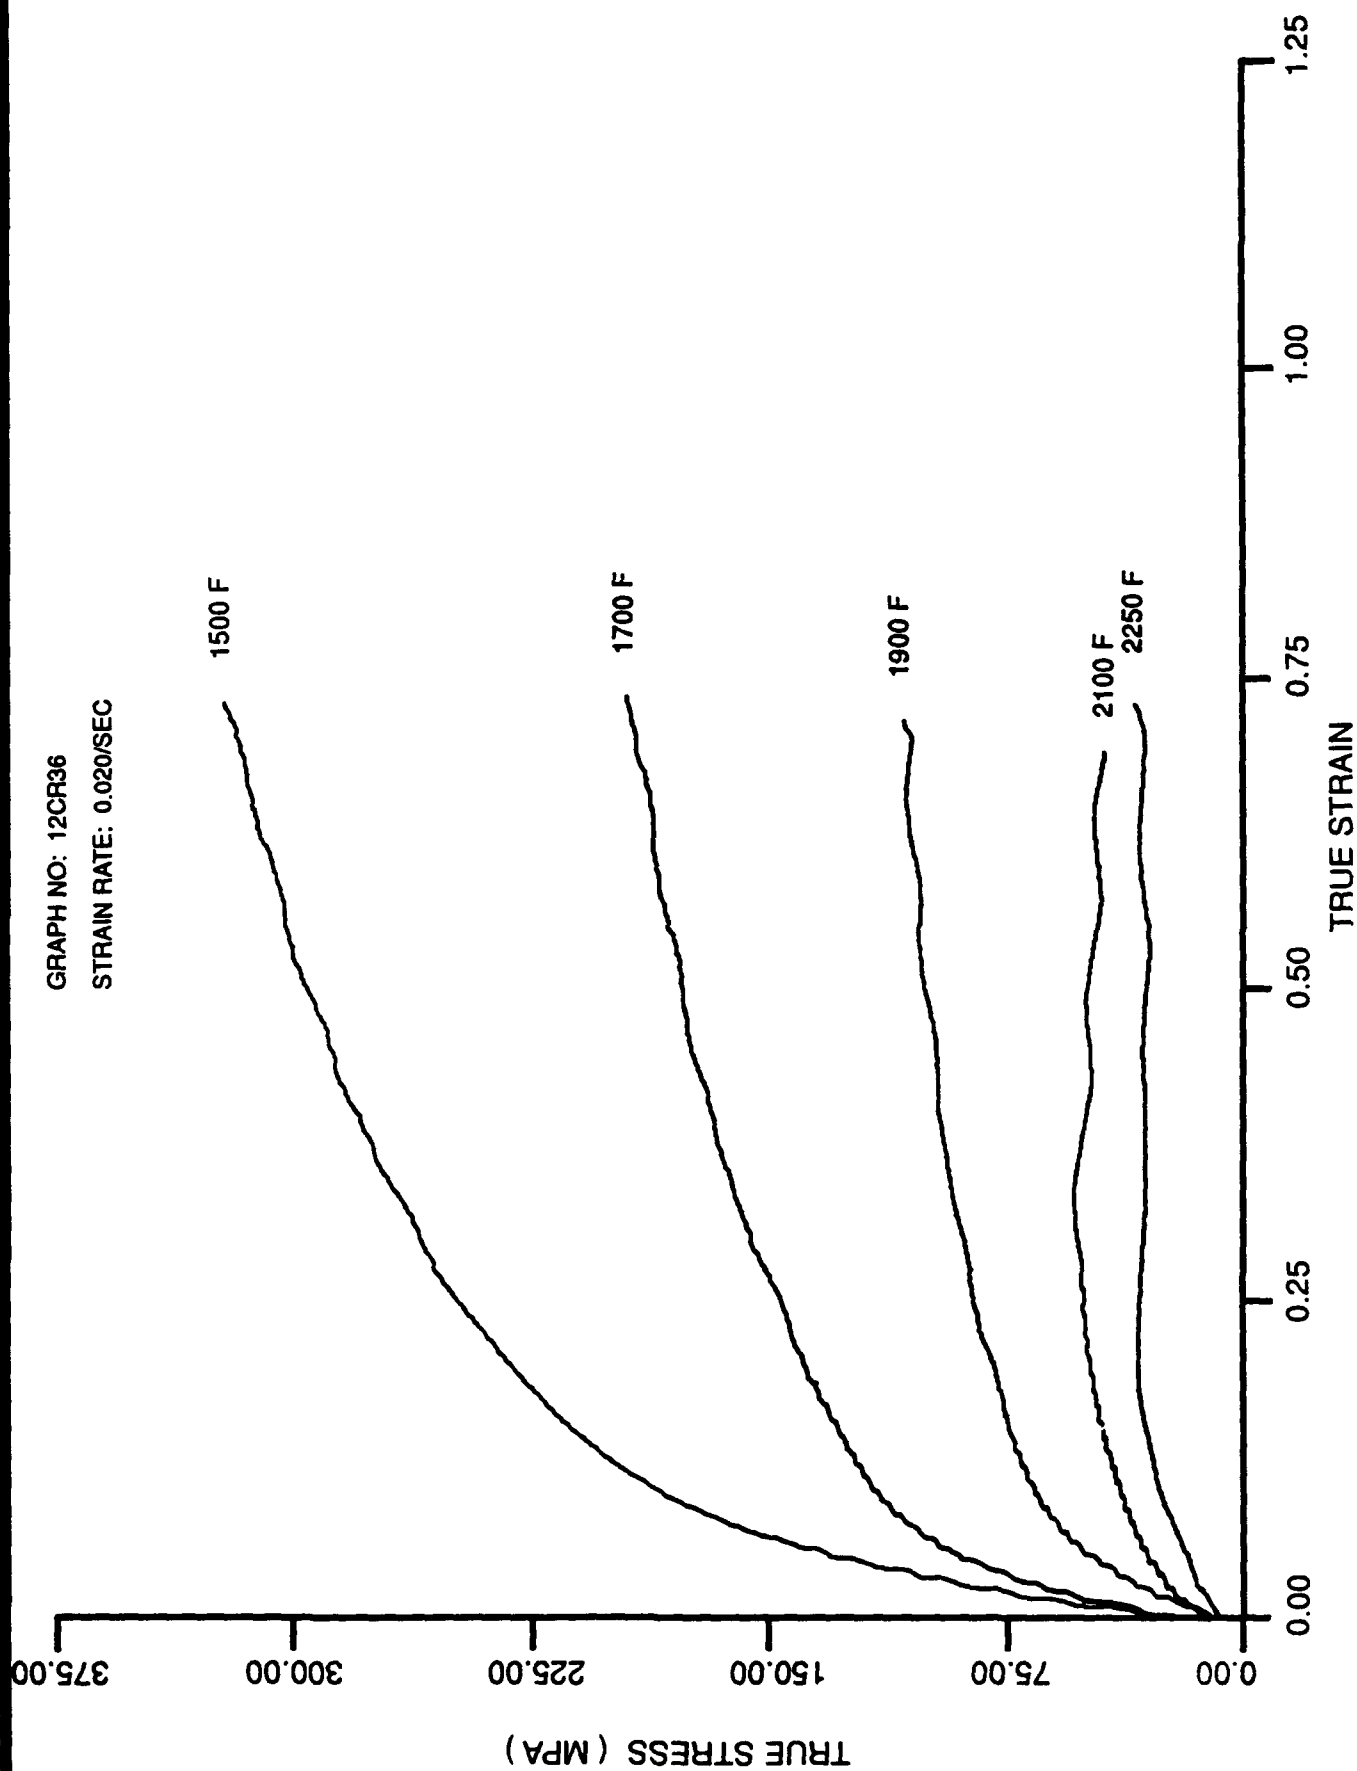

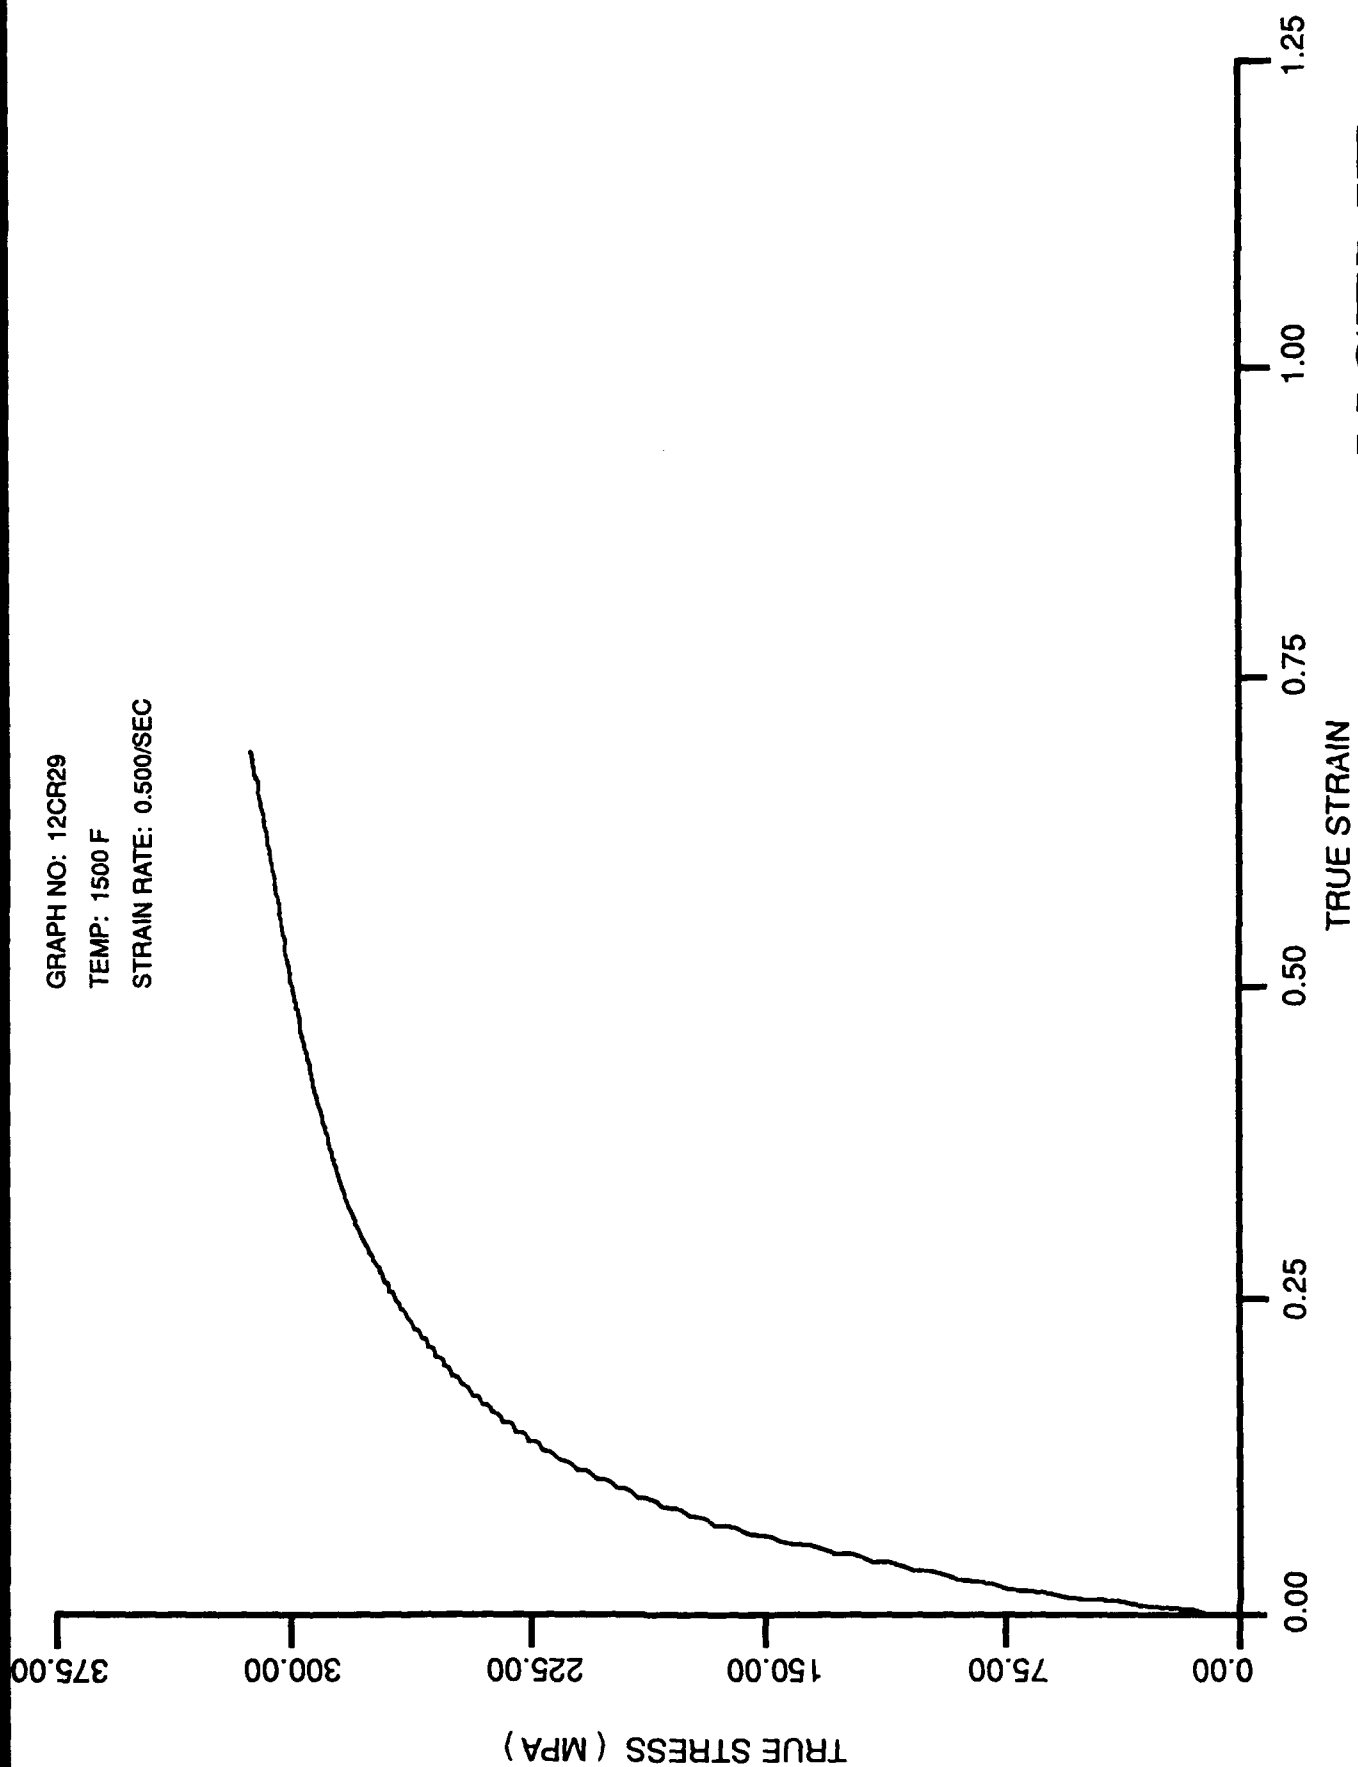


GRAPH NO: 12CR27  
TEMP: 1700 F  
STRAIN RATE: 0.500/SEC

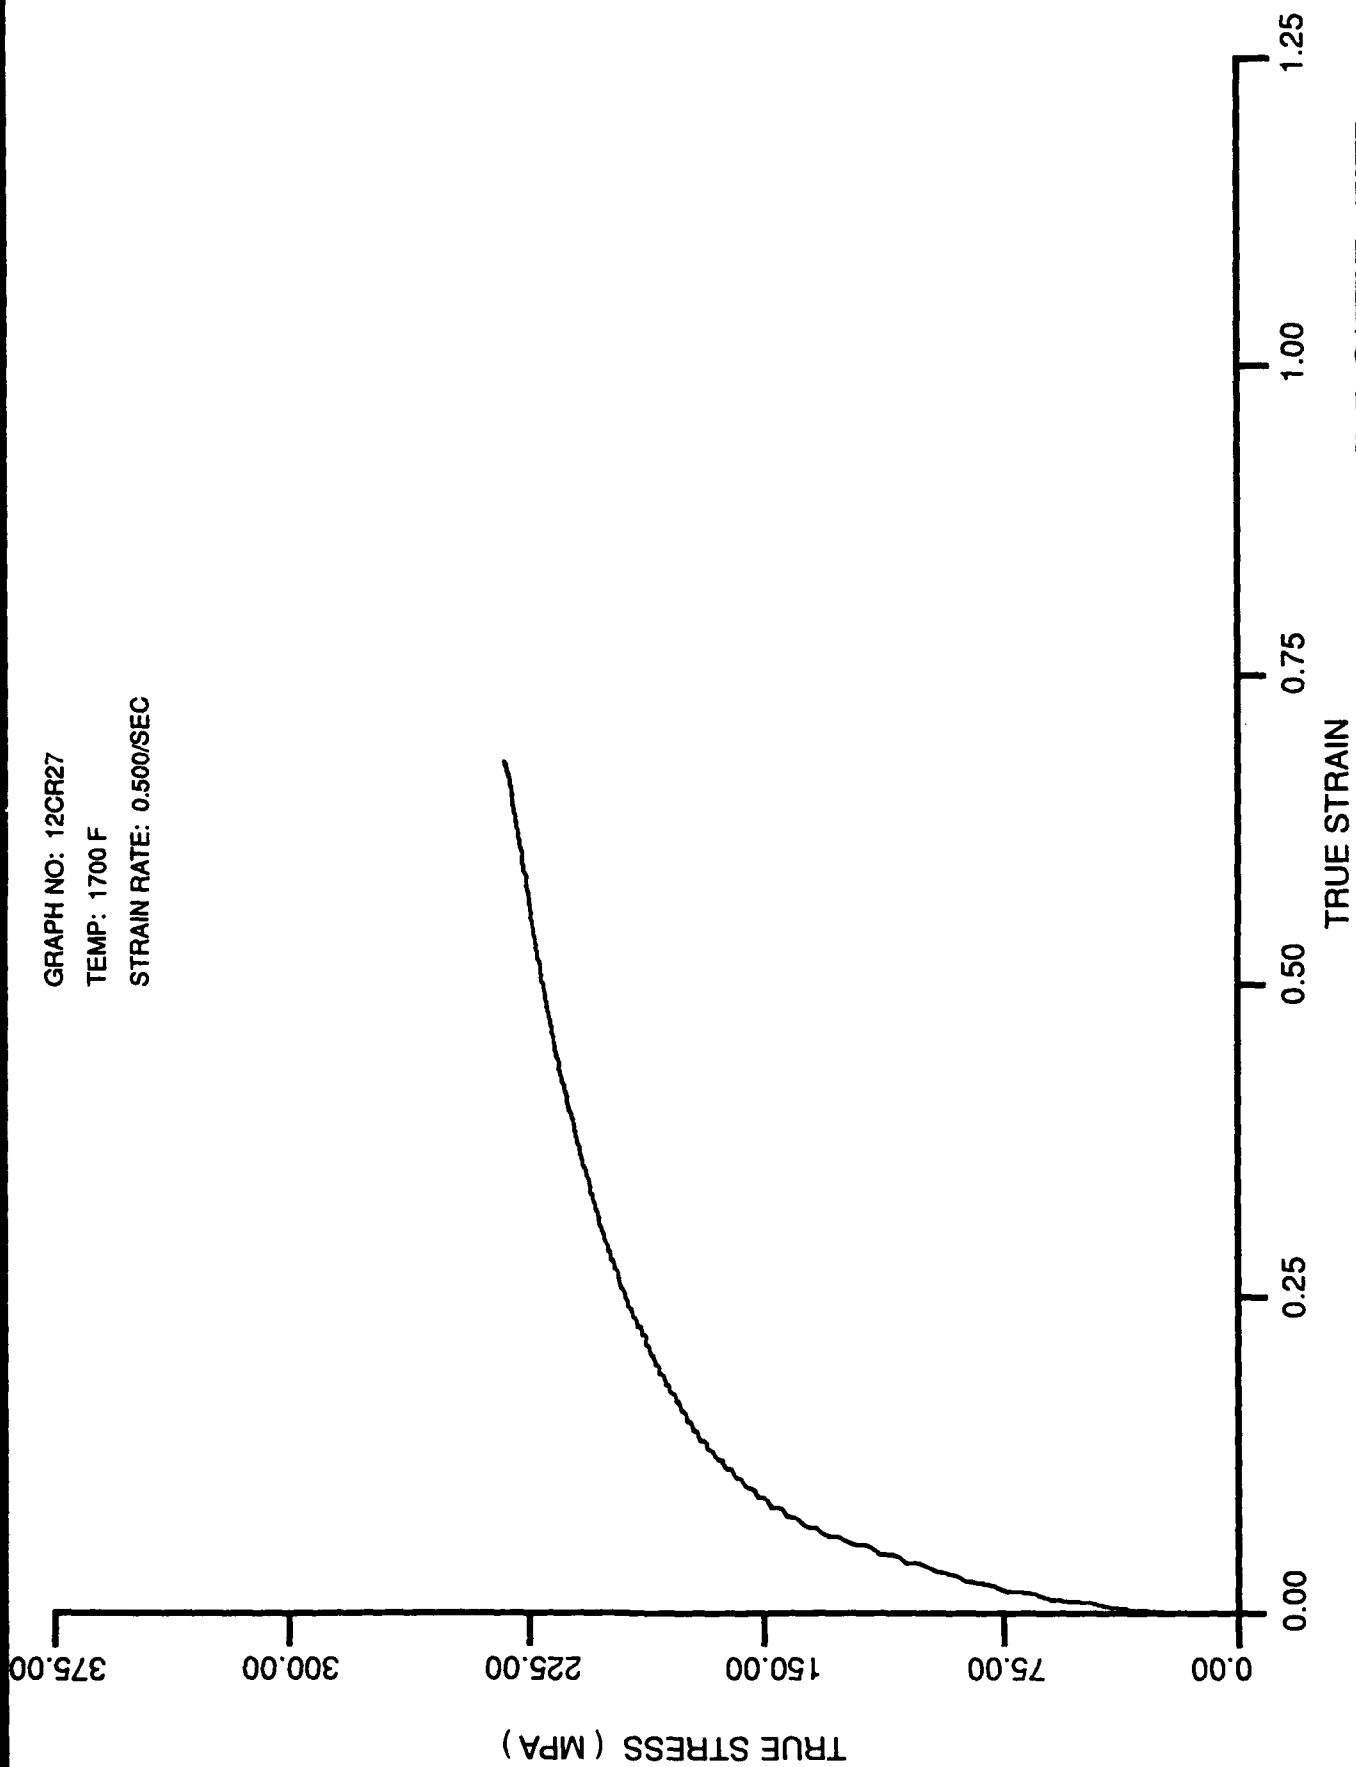


NCEMT

GRAPH NO: 12CR25  
TEMP: 1900 F  
STRAIN RATE: 0.500/SEC

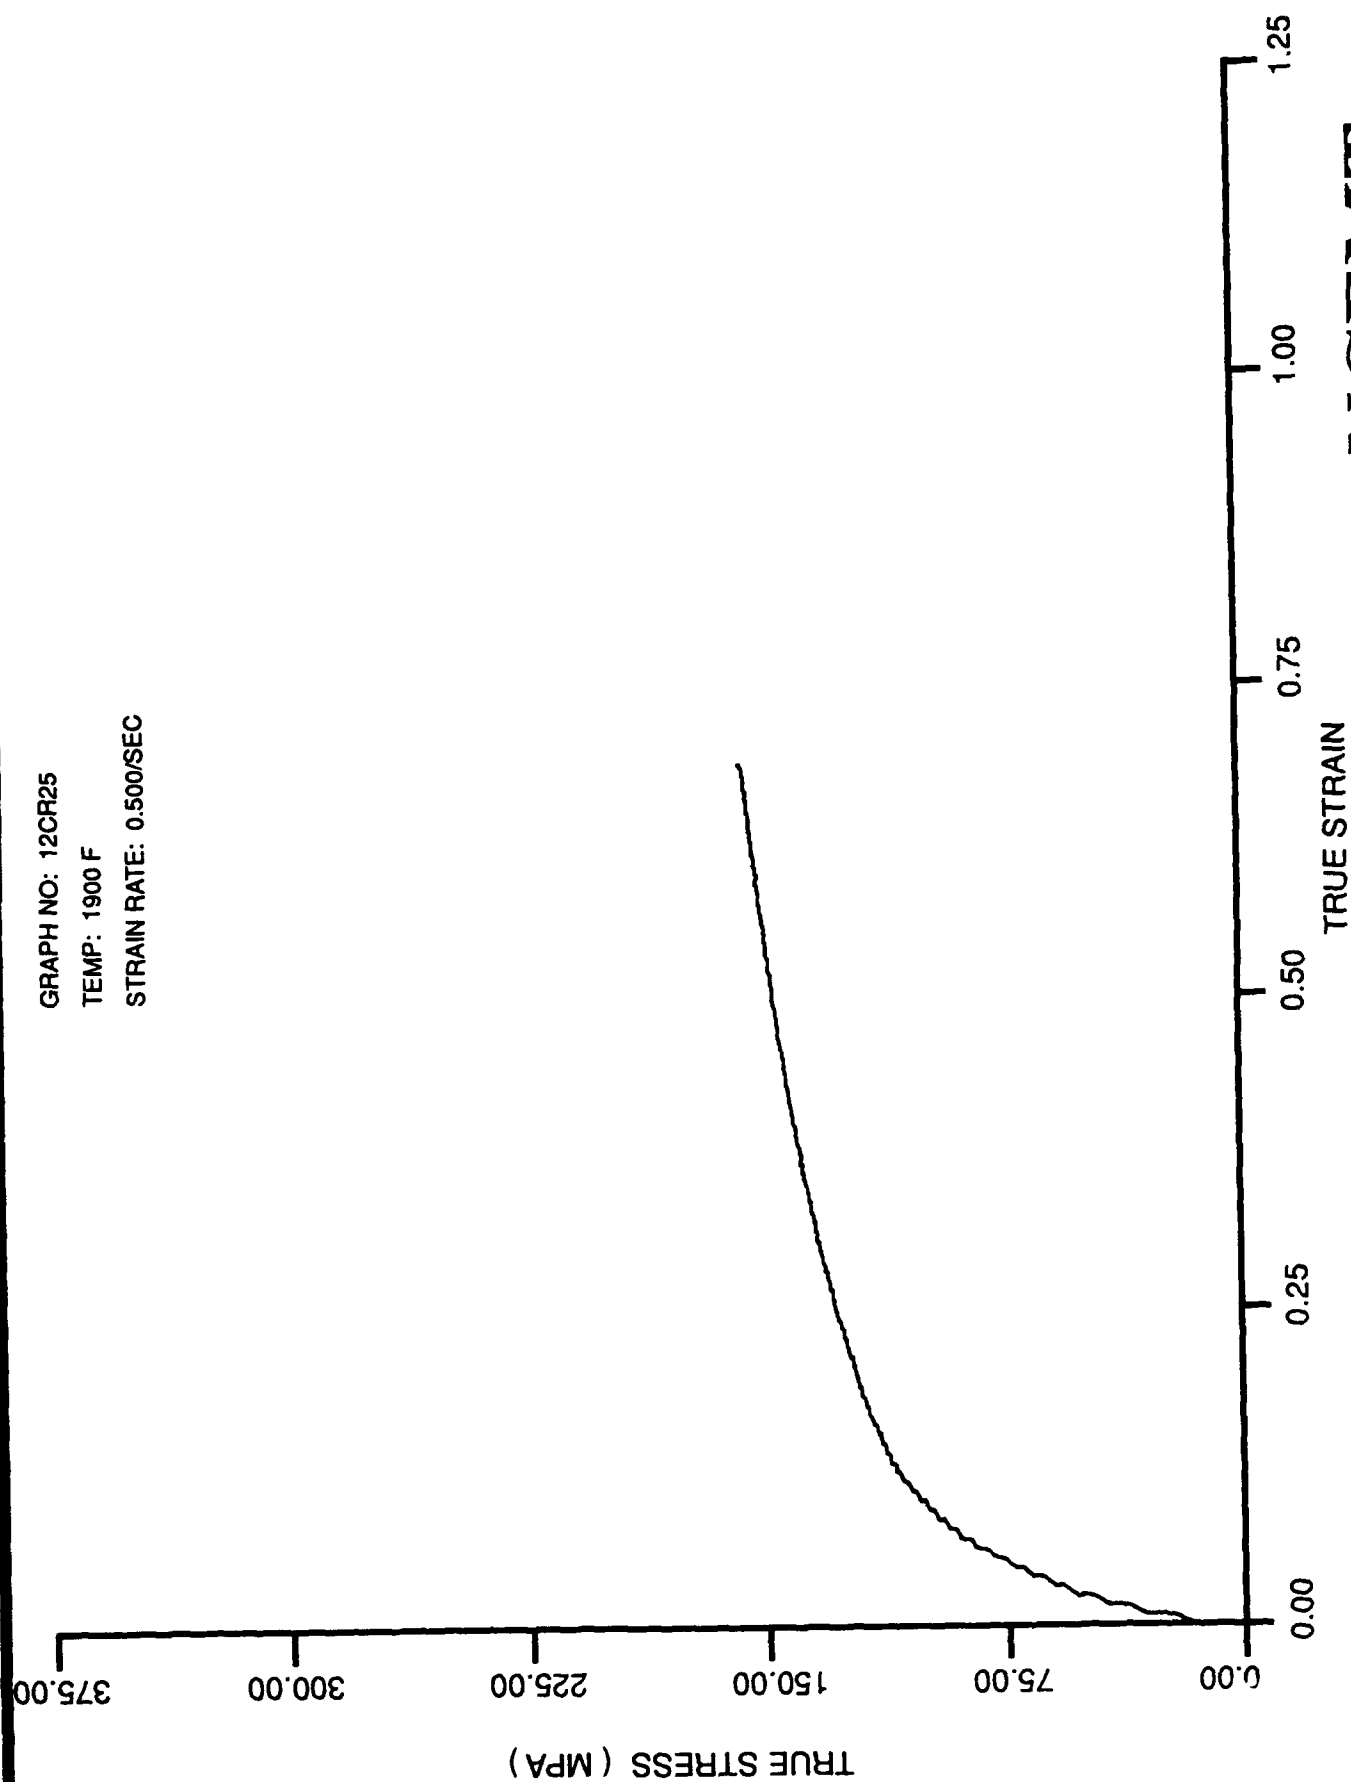


NCENT


GRAPH NO: 12CR23  
 TEMP: 2100 F  
 STRAIN RATE: 0.500/SEC

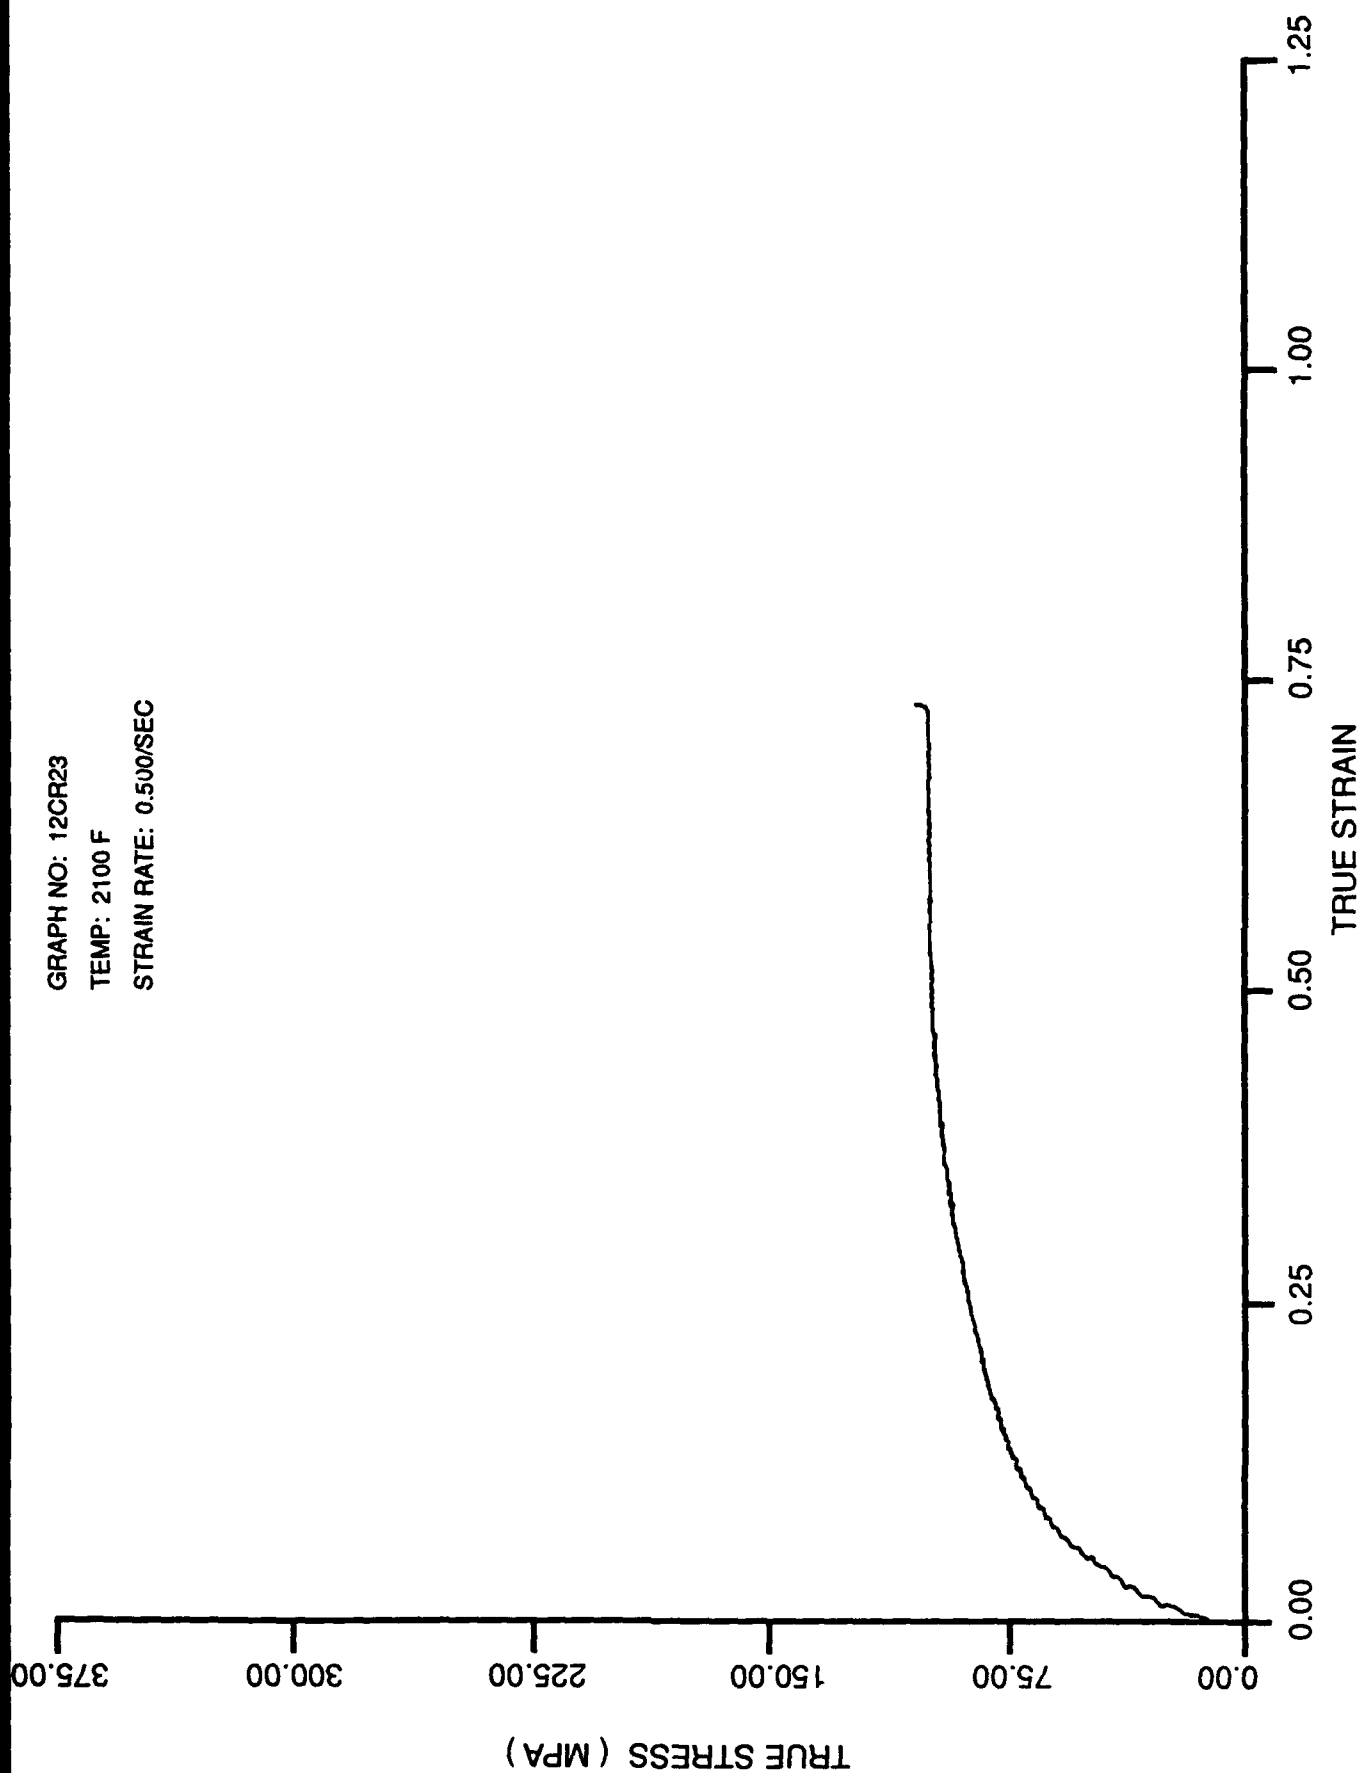

GRAPH NO: 12CR21  
TEMP: 2250 F  
STRAIN RATE: 0.500/SEC

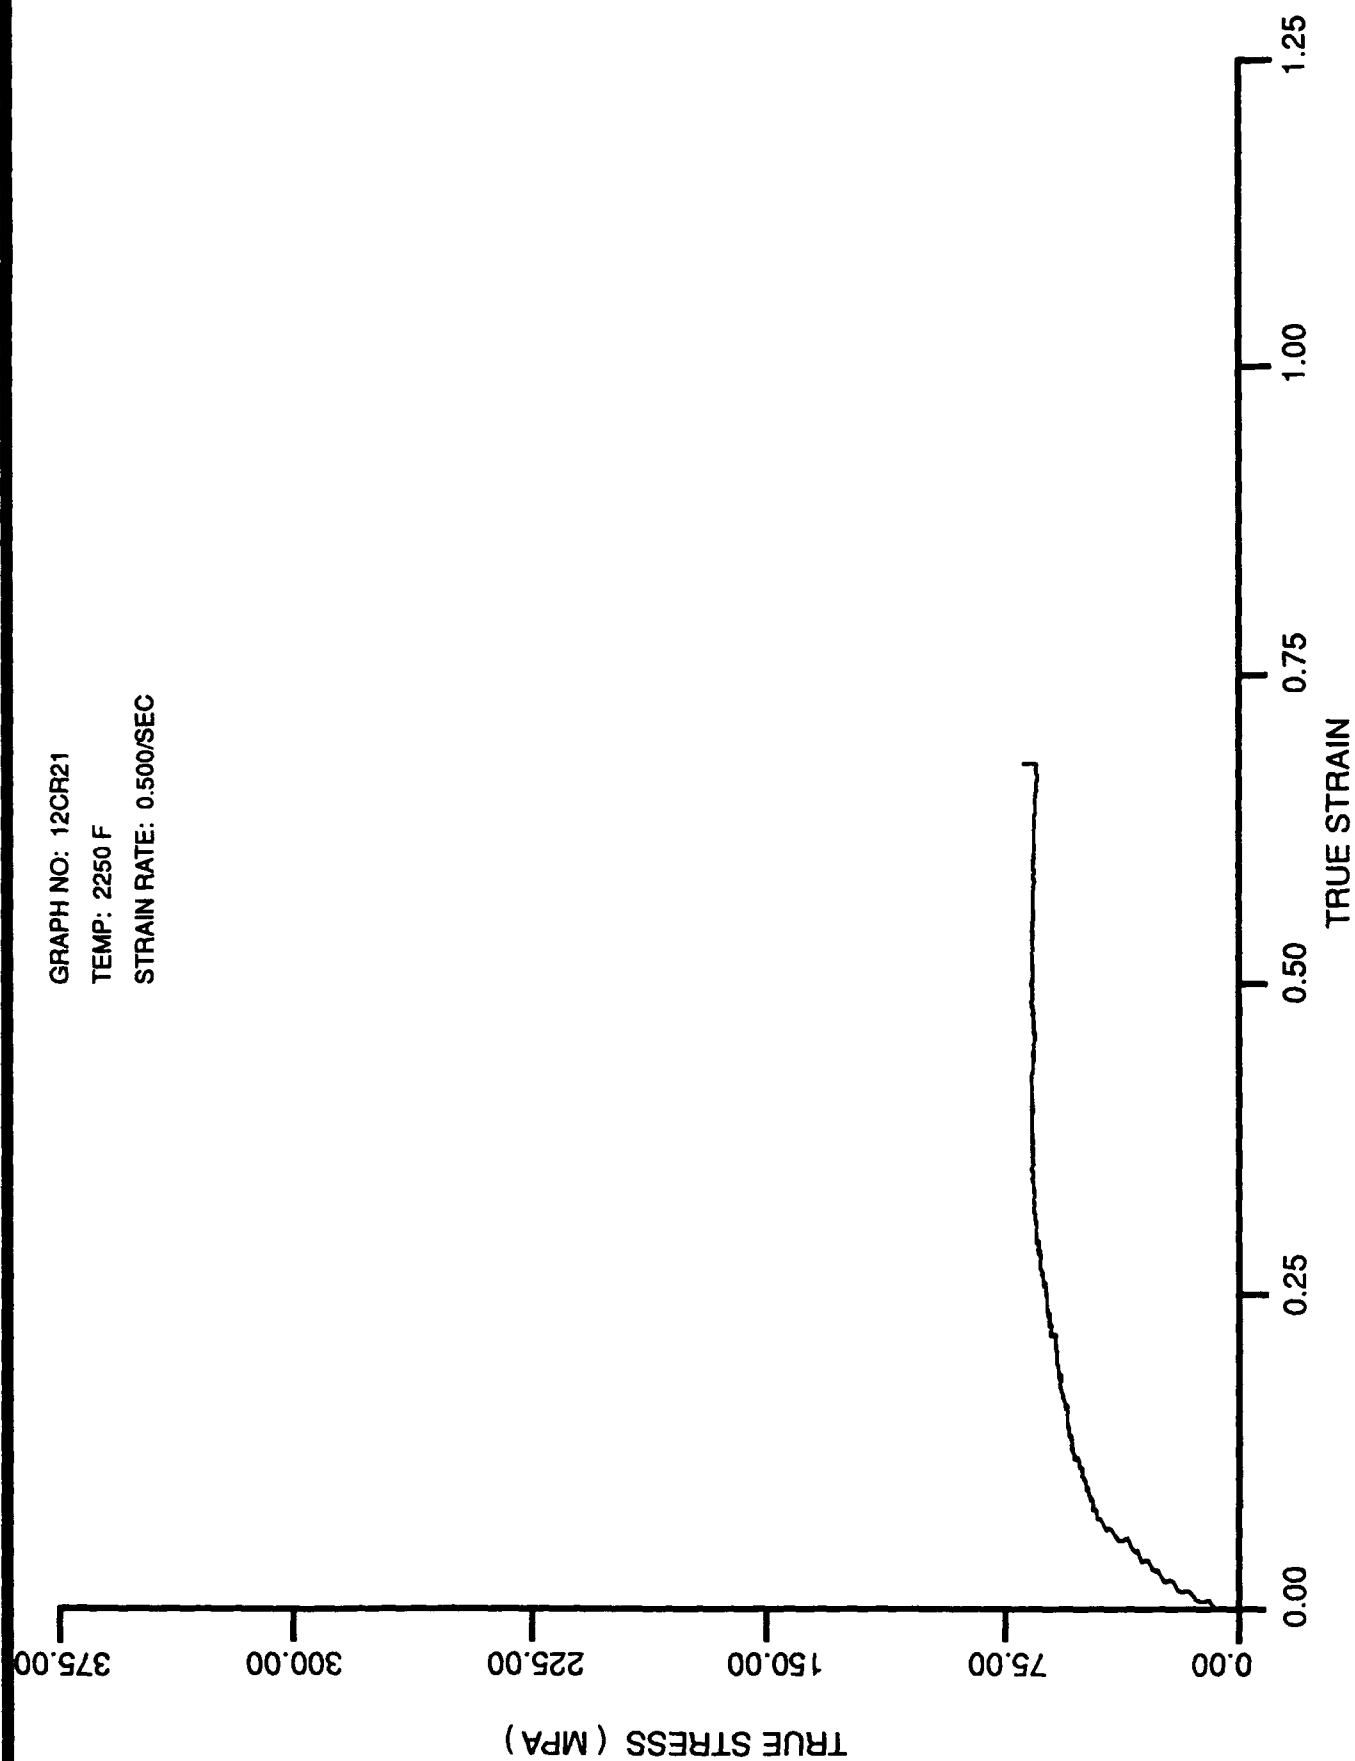

NCENT

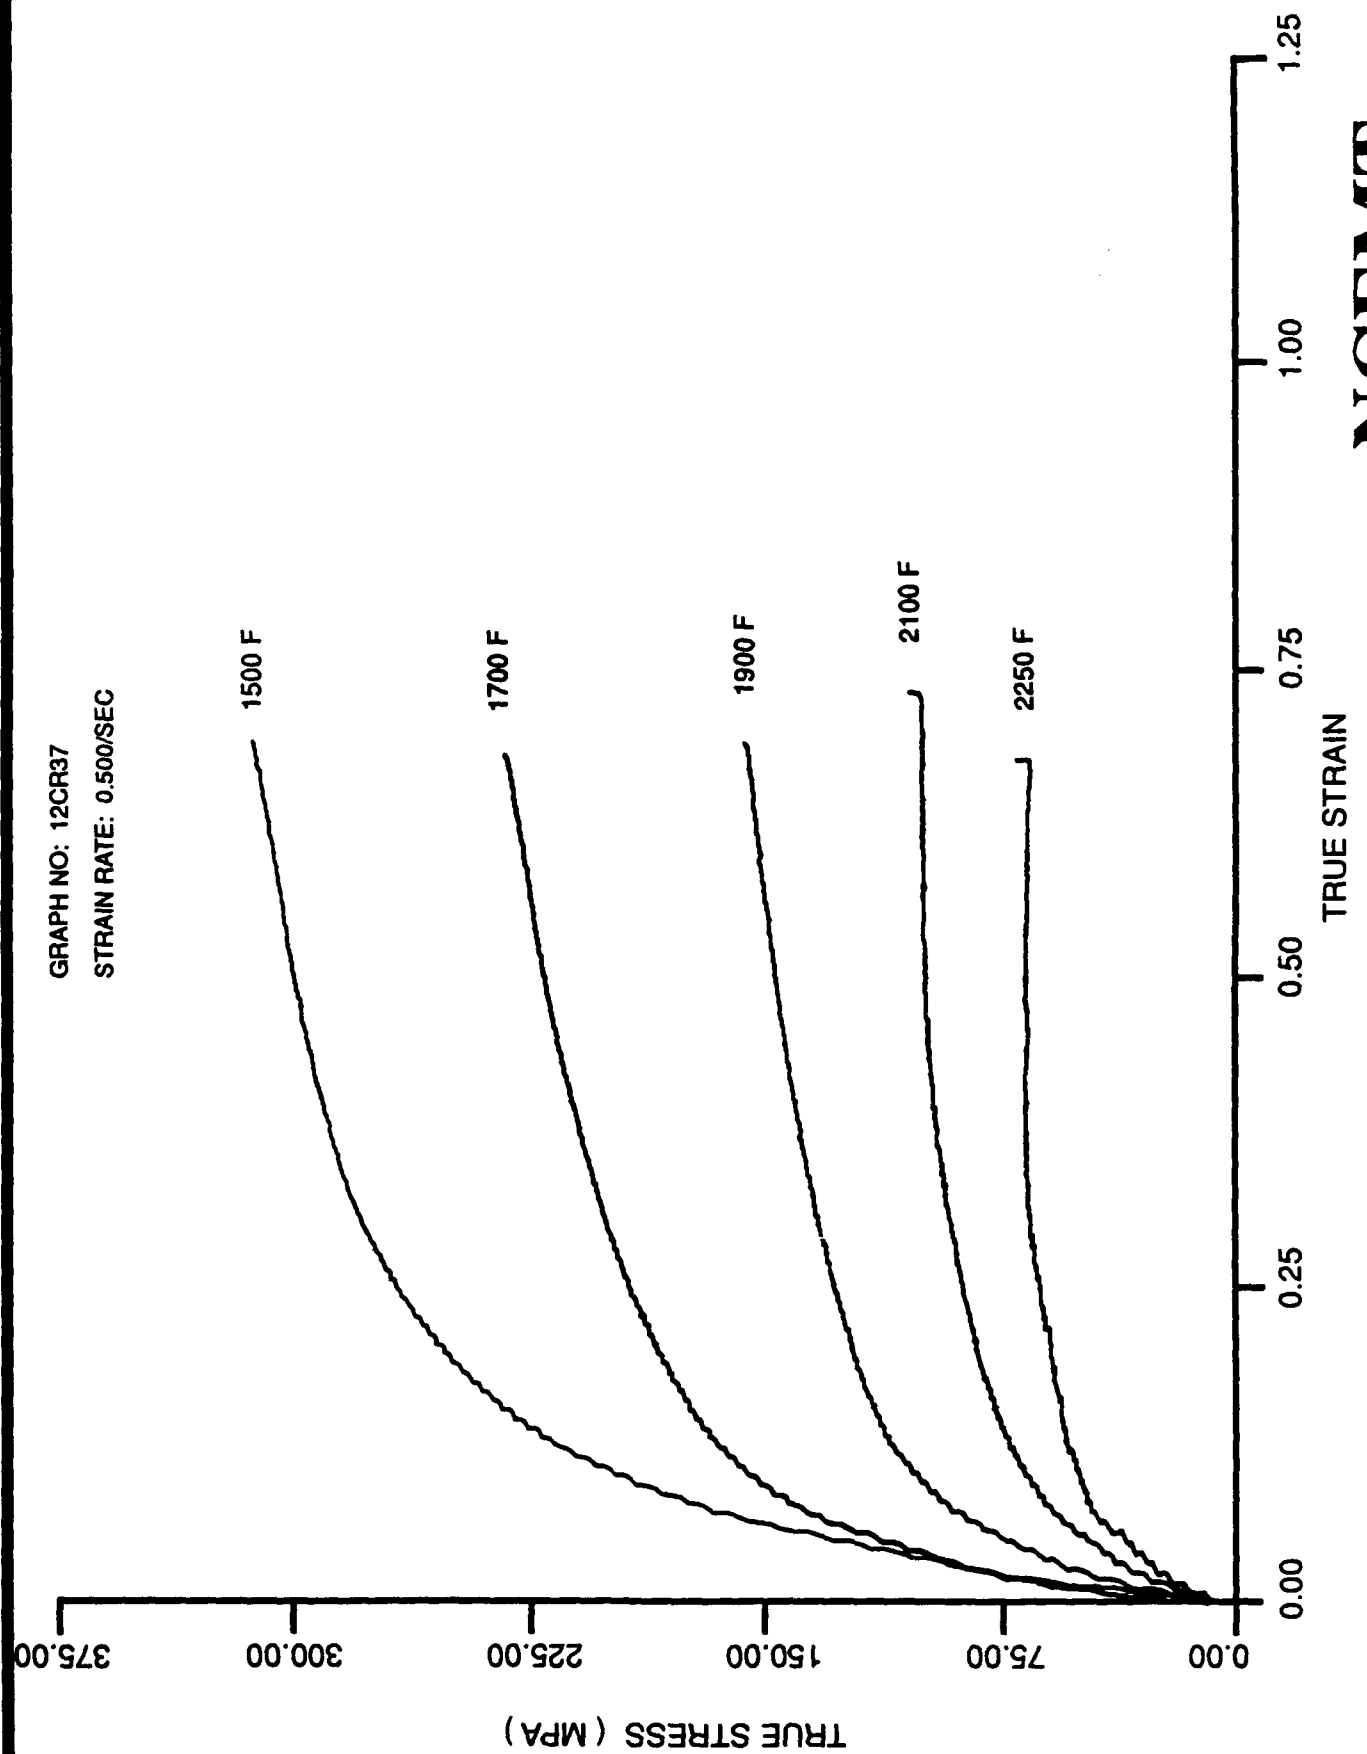

NCENT